CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM

IBM eServer 326m, 2.4 GHz Dual Core AMD Opteron(tm) Processor 280

SPECfp2000 = 2014

SPECfp_base2000 = 1779

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Nov-2005 | Hardware Avail: Nov-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	63.5	2518	58.8	2721
171.swim	3100	152	2040	123	2522
172.mgrid	1800	110	1641	101	1783
173.applu	2100	108	1940	97.7	2150
177.mesa	1400	88.3	1585	68.1	2057
178.galgel	2900	97.1	2986	87.4	3317
179.art	2600	105	2472	75.6	3440
183.equake	1300	83.8	1550	76.4	1702
187.facerec	1900	80.9	2349	77.1	2464
188.ammp	2200	153	1435	146	1510
189.lucas	2000	104	1925	93.0	2149
191.fma3d	2100	143	1464	138	1525
200.sixtrack	1100	157	700	131	842
301.apsi	2600	161	1615	156	1670

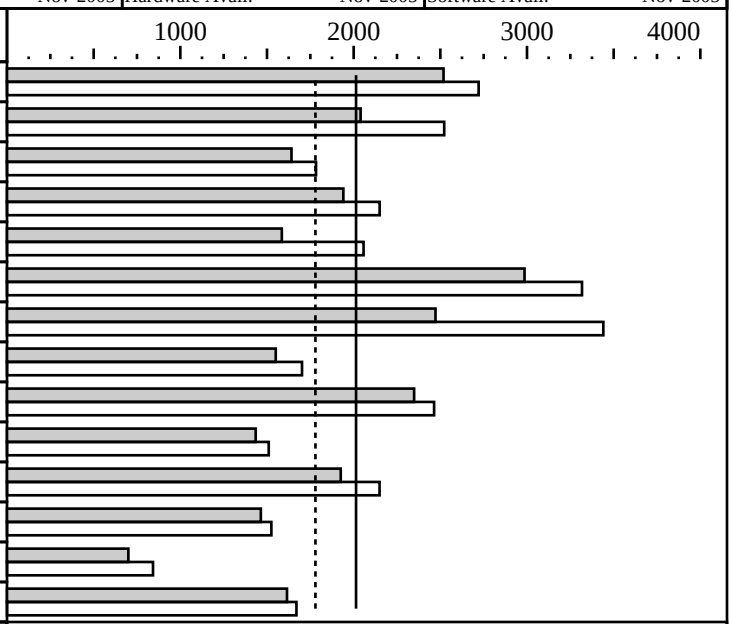

Hardware

CPU:	Dual Core AMD Opteron(tm) Processor 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 1024GB PC3200
Disk Subsystem:	SCSI, 36GB 15K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP2 SLES 64 bit Kernel 2.6.5-7.191-smp (SP2)
Compiler:	PathScale EKO Compiler Suite, Release 2.2.1 AMD Core Math Library 2.5.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 +ACML: Linked with AMD Core Math Library
 Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
 Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex +FDO
 Portability flags:
   178.galgel:    -fixedform
 Peak tuning:
   168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                  -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                  -IPA:linear=on:plimit=50000:callee_limit=5000
                  -INLINE:aggressive=on
   171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:     -Ofast -CG:gcm=off:cflow=on -OPT:IEEE_a=3:unroll_size=200
                  -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
      -WOPT:memopnds=on:aggstr=0
   173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                  -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
    178.galgel:    -Ofast -OPT:fast_complex +ACML +FDO
    179.art:       -O3 -OPT:ofast -fno-math-errno -mno-sse2 -m32
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
    187.facerec:   -Ofast -LNO:fusion=2
                   -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 -LNO:prefetch=0 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:memopnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=60000:early_intrinsics=on
       -fno-math-errno -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Taskset utility used to bind process to CPU(s)
```