CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM

IBM eServer 326m, 2.4 GHz Dual Core AMD Opteron(tm) Processor 280

SPECint2000 = 1698

SPECint_base2000 = 1492

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Nov-2005 | Hardware Avail: Nov-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	96.0	1458	96.1	1457
175.vpr	1400	118	1190	113	1240
176.gcc	1100	66.3	1659	66.1	1664
181.mcf	1800	264	681	158	1136
186.crafty	1000	46.8	2137	45.9	2180
197.parser	1800	165	1089	129	1393
252.eon	1300	52.9	2459	44.6	2913
253.perlbmk	1800	113	1589	97.7	1843
254.gap	1100	70.1	1570	67.5	1630
255.vortex	1900	80.7	2354	71.8	2645
256.bzip2	1500	109	1374	109	1374
300.twolf	3000	222	1350	172	1742

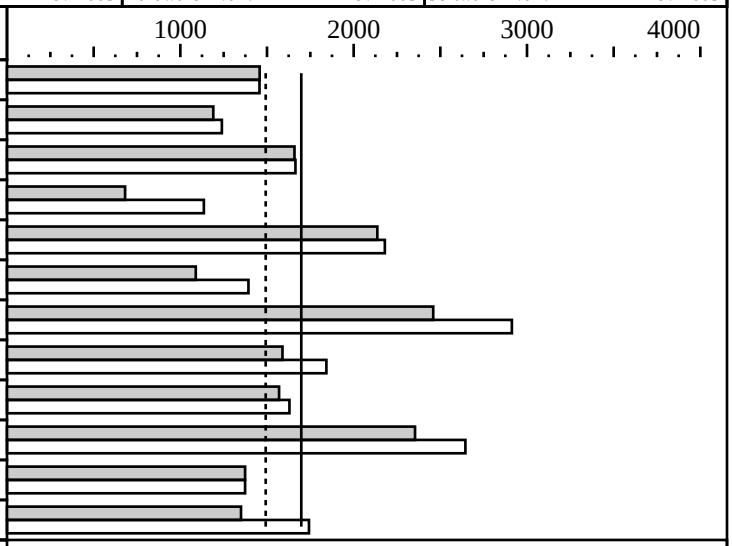

Hardware

CPU:	Dual Core AMD Opteron(tm) Processor 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 1024GB PC3200
Disk Subsystem:	SCSI, 36GB 15K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP2 SLES 64 bit Kernel 2.6.5-7.191-smp (SP2)
Compiler:	PathScale EKO Compiler Suite, Release 2.2.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
 Base tuning for C programs:   -Ofast +FDO
 Base tuning for C++ programs: -Ofast +FDO
 Portability flags:
   186.crafty:  -DLINUX_i386
   252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64
   253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
   254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
   255.vortex:  -DSPEC_CPU2000_LP64
 Peak tuning:
   164.gzip:    -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
   175.vpr:     -O3 -ipa -m32 +FDO
   176.gcc:     -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
   181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
   186.crafty:  -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
   197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
   252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exception
                -LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
    253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
                -fno-math-errno -IPA:plimit=10000 +FDO
    254.gap:    -Ofast -IPA:min_hotness=5 -OPT:alias=disjoint -CG:movnti=1 +FDO
    255.vortex: -Ofast -OPT:goto=off +FDO
    256.bzip2:  basepeak=true
    300.twolf:  -O2 -CG:gcm=off:p2align_freq=100000
                -OPT:ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
                -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
   Taskset utility used to bind process to CPU(s)
```