CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECfp_rate2000 = 75.5

SPECfp_rate_base2000 = 69.1

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

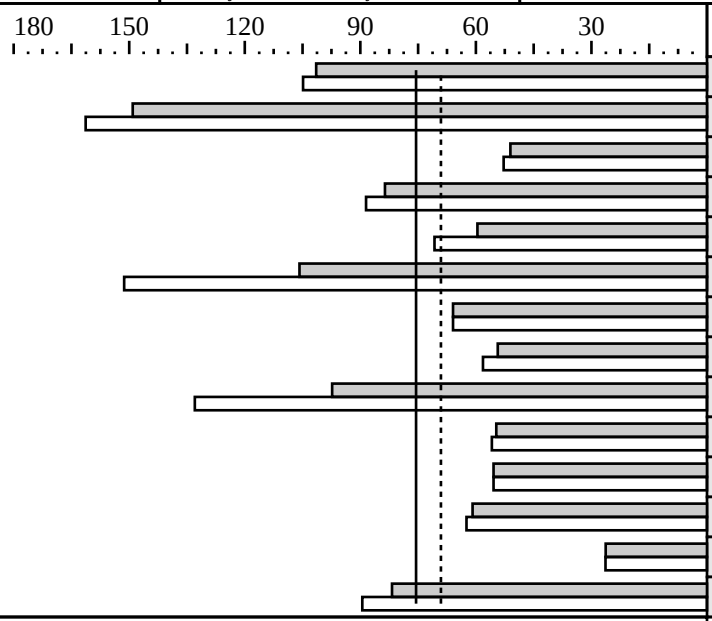

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	73.2	101	4	70.8	105
171.swim	4	96.5	149	4	89.2	161
172.mgrid	4	164	51.0	4	158	52.8
173.applu	4	117	83.6	4	110	88.5
177.mesa	4	109	59.6	4	91.8	70.7
178.galgel	4	127	106	4	88.9	151
179.art	4	183	65.9	4	183	65.9
183.equake	4	111	54.3	4	104	58.2
187.facerec	4	90.6	97.3	4	66.3	133
188.ammp	4	187	54.7	4	183	55.9
189.lucas	4	167	55.4	4	167	55.4
191.fma3d	4	160	60.9	4	156	62.4
200.sixtrack	4	194	26.3	4	194	26.4
301.apsi	4	148	81.8	4	135	89.5

Hardware

CPU:	AMD Opteron (TM) 275
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 (order by # of chips)
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16GB (8x2GB, PC3200 CL3 DDR ECC Registered SDRAM)
Disk Subsystem:	SAS, 36GB, 10K RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 3/05 HW1
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  F90: f90
  F77: f90

FDO:  PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
      fdo_pre0:  rm -rf ./feedback.profile


Floating point base flags:
  F90:   -fast -xipo=2 -xarch=amd64 -xprefetch_level=3 ONESTEP=yes
    C:   -fast -xcrossfile -xalias_level=std -xpagesize=2m ONESTEP=yes

Floating point peak flags:
 ONESTEP=yes for all benchmarks

 168.wupwise:   -fast -xpad=common:3969 -xipo=2 -xarch=amd64 -xprefetch_level=3  -xpagesize_heap=2m
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
171.swim:      -fast -xpad=common:3969 -xipo=2 -xvector=simd -xprefetch_level=3 -Qoption iropt
                 -Atile:skewp,-Ainline:cs=700 -xarch=amd64 -Qoption ube_ipa -inl_alt
                 -xpagesize_stack=2m
172.mgrid:     -fast -stackvar -xpad=common:900 -xipo=2 -xarch=amd64 -xprefetch_level=3 -xvector
                 -xpagesize=2m -Qoption ld -M,/usr/lib/ld/map.bssalign
173.applu:       -fast -stackvar -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64
                 -qoption iropt -Rloop_dist -xpagesize_heap=2m
177.mesa:      -fast -xO4 -xipo=2 -Wd,-iropt-prof -xarch=amd64 -xalias_level=strong -xpagesize=2m +FDO
178.galgel:    -fast -xipo=2 -xpagesize_heap=2m -xprefetch_level=3 -xvector=simd -xarch=amd64
                 RM_SOURCES=lapak.f90
                 EXTRALIBS=-xlic_lib=sunperf
179.art:         basepeak=yes
183.equake:     -fast -xipo=2 -xprefetch -xalias_level=strong -xpagesize=2m -lmopt -lm +FDO
187.facerec:     -fast -xO4 -xipo=2 -xprefetch_level=3 -xpagesize=2m
                 RM_SOURCES=cfftb.f90 cffti.f90 cfftf.f90
                 EXTRALIBS=-xlic_lib=sunperf
188.ammp:       -fast -xO4 -xipo=2 -xarch=amd64 -xalias_level=std -xpagesize_heap=2m -lmopt -lm
189.lucas:       basepeak=yes
191.fma3d:      -fast -fsimple=1 -xipo=2 -xprefetch_level=3 -xarch=amd64 -xpagesize_heap=2m +FDO
200.sixtrack:    -fast -xipo=2 -O -xprefetch_level=3 -xarch=amd64 -xpagesize_heap=2m
                 -Qoption ld -M,/usr/lib/ld/map.bssalign +FDO
301.apsi:        -fast -xO4 -xipo=2 -xprefetch_level=3 -xarch=amd64 -xpagesize=2m

Portability:
 178.galgel:  -e -fixed -DSPEC_CPU2000_LP64

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

Processes were bound to CPUs using submit=pbind

Default BIOS setting was used

This result was measured on the Sun Fire X4200.  In addition,
Sun has submitted the same result for the Sun Fire X4100, which is
electronically equivalent to the Sun Fire X4200.
```