CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 275)

SPECfp2000 = 1690

SPECfp_base2000 = 1546

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Dec-2005 | Hardware Avail: Sep-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	67.7	2364	67.7	2364
171.swim	3100	143	2168	145	2140
172.mgrid	1800	127	1415	127	1415
173.applu	2100	156	1343	145	1445
177.mesa	1400	163	859	80.3	1743
178.galgel	2900	113	2562	104	2794
179.art	2600	67.0	3882	67.2	3872
183.equake	1300	86.7	1499	86.7	1499
187.facerec	1900	112	1696	113	1680
188.ammp	2200	210	1047	171	1287
189.lucas	2000	120	1670	104	1920
191.fma3d	2100	153	1370	145	1447
200.sixtrack	1100	164	672	164	672
301.apsi	2600	198	1311	198	1311

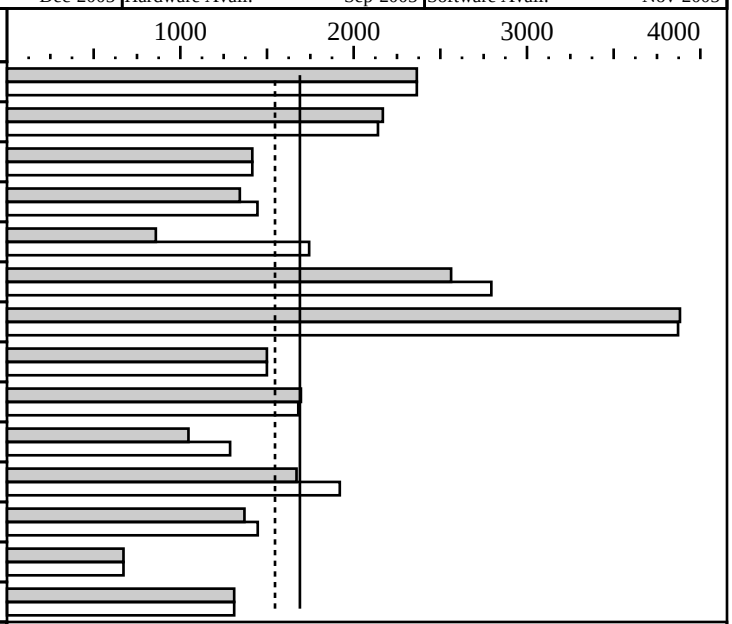

Hardware

CPU:	AMD Opteron (TM) 275
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 8.1 Build 20050524Z) Intel Fortran Compiler for 32-bit applications, (version 8.1 build 20050517Z) PGI Fortran compiler 6.0-4 for Windows XP (32-bit) PGI C compiler 6.0-4 for Windows XP (32-bit) Microsoft Visual Studio .NET 7.0.9466 (for libraries) AMD Core Math Library V2.6.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
 +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use (Intel compiler)
 +FDO*: PASS1=-Mpfi  PASS2=-Mpfo (PGI compiler)
 +ACML is linking with AMD Core Math Library V2.6.0
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
 pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:       pgcc  -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO* ONESTEP=1
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
 168.wupwise:  pgf90 basepeak=yes
 171.swim:     ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0 ONESTEP=1
 172.mgrid:    pgf90 basepeak=yes
 173.applu:    ifort -Qipo  -O3  -QaxN -QxW +FDO -auto ONESTEP=1
 177.mesa:     icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias ONESTEP=1
                    -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:   pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML ONESTEP=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 179.art:      pgcc  -fastsse -Mipa=fast,inline
 183.equake:   icl   basepeak=yes
 187.facerec:  ifort -Qipo             -QxW +FDO -Qunroll3  ONESTEP=1
                     -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
 188.ammp:     icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias ONESTEP=1
 189.lucas:    ifort -Qipo             -QxW      -Qunroll1 ONESTEP=1
 191.fma3d:    ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias- ONESTEP=1
 200.sixtrack: pgf90 basepeak=yes
 301.apsi:     pgf90 basepeak=yes
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```