CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 280)

SPECint_rate2000 = 19.5

SPECint_rate_base2000 = 18.6

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Dec-2005 | Hardware Avail: Sep-2005 | Software Avail: Nov-2005

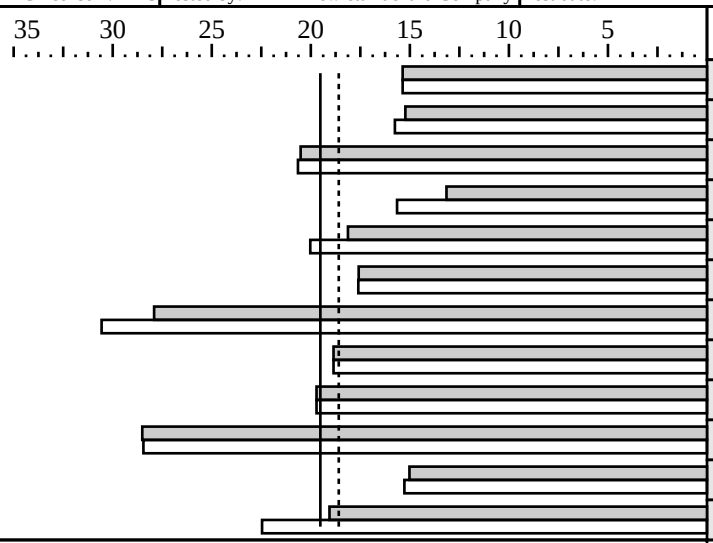

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	106	15.4	1	106	15.4
175.vpr	1	107	15.2	1	103	15.8
176.gcc	1	62.2	20.5	1	61.8	20.6
181.mcf	1	159	13.2	1	133	15.6
186.crafty	1	64.0	18.1	1	57.9	20.0
197.parser	1	119	17.6	1	119	17.6
252.eon	1	54.0	27.9	1	49.3	30.6
253.perlbmk	1	111	18.9	1	111	18.9
254.gap	1	64.7	19.7	1	64.7	19.7
255.vortex	1	77.3	28.5	1	77.5	28.5
256.bzip2	1	116	15.0	1	114	15.3
300.twolf	1	183	19.1	1	155	22.5

Hardware

CPU:	AMD Opteron (TM) 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler 8.0 Build 20040318Z Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -GX -GR +FDO ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:    basepeak=yes
  175.vpr:     -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:     -fast -arch:SSE2 -Oi- -Qunroll3 +FDO
  181.mcf:     -fast -QaxN +FDO ONESTEP=yes
  186.crafty:  -fast -arch:SSE2 +FDO ONESTEP=yes
  197.parser:  -arch:SSE2 -Oi- -Qipo +FDO ONESTEP=yes
  252.eon:     -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk: basepeak=yes
  254.gap:     basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    255.vortex:  -fast -arch:SSE2 -Oi- -Qoption,c,-ip_ninl_max_stats=2000
                 -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO shlw32M.lib ONESTEP=yes
    256.bzip2:   -fast -Qunroll2
    300.twolf:   -fast -arch:SSE2 -Qansi_alias +FDO shlw32M.lib ONESTEP=yes
  BIOS Configuration Notes
    Node Interleaving Disabled
  Other Configuration Notes
    /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.

Submitted_by: "Schmidt, David (Performance Eng.)" <D.Schmidt@hp.com>
Submitted: Mon Dec 12 19:17:10 2005
Submission: cpu2000-20051212-05247.sub
```