CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 280)

SPECint2000 = 1683

SPECint_base2000 = 1602

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Dec-2005 | Hardware Avail: Sep-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	106	1324	106	1324
175.vpr	1400	107	1313	103	1358
176.gcc	1100	62.2	1768	61.8	1780
181.mcf	1800	159	1134	133	1349
186.crafty	1000	64.0	1563	57.9	1726
197.parser	1800	119	1516	119	1517
252.eon	1300	54.0	2406	49.3	2635
253.perlbmk	1800	111	1625	111	1625
254.gap	1100	64.7	1699	64.7	1699
255.vortex	1900	77.3	2458	77.5	2453
256.bzip2	1500	116	1295	114	1317
300.twolf	3000	183	1643	155	1936

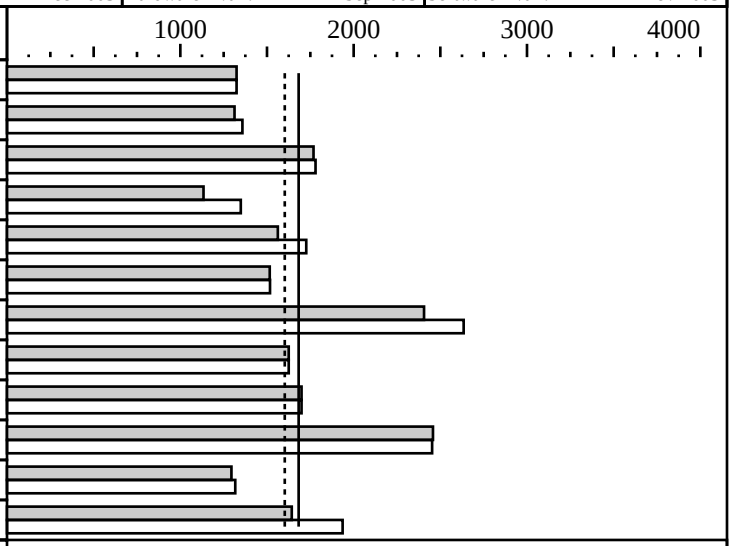

Hardware

CPU:	AMD Opteron (TM) 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler 8.0 Build 20040318Z Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -GX -GR +FDO ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:    basepeak=yes
  175.vpr:     -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:     -fast -arch:SSE2 -Oi- -Qunroll3 +FDO
  181.mcf:     -fast -QaxN +FDO ONESTEP=yes
  186.crafty:  -fast -arch:SSE2 +FDO ONESTEP=yes
  197.parser:  -arch:SSE2 -Oi- -Qipo +FDO ONESTEP=yes
  252.eon:     -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk: basepeak=yes
  254.gap:     basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    255.vortex:  -fast -arch:SSE2 -Oi- -Qoption,c,-ip_ninl_max_stats=2000
                 -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO shlw32M.lib ONESTEP=yes
    256.bzip2:   -fast -Qunroll2
    300.twolf:   -fast -arch:SSE2 -Qansi_alias +FDO shlw32M.lib ONESTEP=yes
  BIOS Configuration Notes
    Node Interleaving Disabled
  Other Configuration Notes
    /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```