CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER850 (2160MHz)

SPECint_rate2000 = 283

SPECint_rate_base2000 = 259

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: Dec-2005 | Hardware Avail: Feb-2006 | Software Avail: Nov-2005

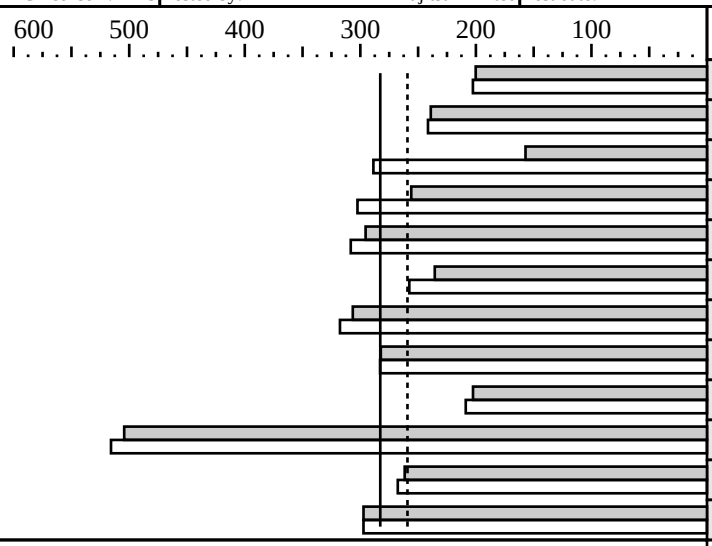

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	130	200	16	128	203
175.vpr	16	109	239	16	108	241
176.gcc	16	130	157	16	70.7	289
181.mcf	16	131	256	16	110	302
186.crafty	16	62.8	295	16	60.2	308
197.parser	16	142	236	16	130	258
252.eon	16	78.7	307	16	76.0	318
253.perlbmk	16	118	282	16	118	283
254.gap	16	101	202	16	97.8	209
255.vortex	16	69.9	504	16	68.4	516
256.bzip2	16	106	262	16	104	268
300.twolf	16	187	297	16	187	297

Hardware

CPU:	SPARC64 V
CPU MHz:	2160
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	1 to 16 (increments of 1)
Parallel:	None
Primary Cache:	128KBI + 128KBD on chip
Secondary Cache:	4MB(I+D) on chip
L3 Cache:	None
Other Cache:	None
Memory:	32GB (512MB x 64)
Disk Subsystem:	1 x 36.4GB SCSI (10000rpm)
Other Hardware:	None

Software

Operating System:	Solaris 10
Compiler:	Sun Studio 11
File System:	ufs
System State:	multi user

Notes/Tuning Information

```
FDO: (for Sun Studio 11)
fdo_pre0=rm -rf ./feedback.profile ./SunWS_cache
PASS1=-xprofile=collect:./feedback
PASS2=-xprofile=use:./feedback

Integer base flags:
(using C compiler of Sun Studio 11)
-fast -xtarget=ultra3cu -xipo=2 ONESTEP=yes FDO
(using C++ compiler of Sun Studio 11)
-fast -xipo=2 ONESTEP=yes FDO

Integer peak flags:
(using C compiler of Sun Studio 11)
164.gzip:     -xarch=v8plusb -xchip=ultra2 -xcache=128/64/2:4096/64/4
              -xalias_level=std -xipo=2 -W2,-whole -xO5 ONESTEP=yes FDO
175.vpr:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=std -xchip=ultra2 -xipo=2 ONESTEP=yes FDO
176.gcc:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -ll2amm ONESTEP=yes FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
181.mcf:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xprefetch_level=3 -W2,-Apf:llist=3:noinnerllist
              ONESTEP=yes FDO
186.crafty:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -xpagesize=512K -W2,-Ashort_ldst
              ONESTEP=yes FDO
197.parser:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -Wc,-Qgsched-T6,
              -Qgsched-trace_late=1,-Qipa:valueprediction ONESTEP=yes FDO
253.perlbmk:  -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xalias_level=std ONESTEP=yes FDO
254.gap:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -xprefetch_level=3 -xvector
              -W2,-Abcopy ONESTEP=yes FDO
255.vortex:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xrestrict -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qdepgraph-early_cross_call=1 -ll2amm ONESTEP=yes FDO
256.bzip2:    -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xalias_level=strong -xrestrict ONESTEP=yes FDO
300.twolf:    -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 ONESTEP=yes FDO

(using C++ compiler of Sun Studio 11)
252.eon:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -noex -xalias_level=compatible -xipo=2
              -Qoption cg -Qeps:enabled=1,-Qeps:ws=32 ONESTEP=yes FDO

Portability:
176.gcc:      -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty:   -DSUN
253.perlbmk:  -DSPEC_CPU2000_SOLARIS
254.gap:      -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

System Tunables:
(for /etc/system)
      set consistent_coloring=1
      set tune_t_fsflushr=86400
      set autoup=86400
      set memscrub_period_sec=172800

Shell Environments:
      Stack size set to unlimited via "ulimit -s unlimited"
      MPSSHEAP=4M
      MPSSSTACK=4M
      LD_PRELOAD=mpss.so.1

Procceses were bound to CPUs using "submit=pbind"

Extended Interleave Mode enabled.

Sun Studio 11, posted at URL http://www.sun.com/software/products/studio/index.xml
was used for this submission.

Model PRIMEPOWER850 (2160MHz) and model PRIMEPOWER900 (2160MHz) are electronically
equivalent. This result was measured on model PRIMEPOWER900 (2160MHz).
```