# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX220, AMD Opteron (TM) 265

SPECfp_rate2000 = 64.4

SPECfp_rate_base2000 = 59.7

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jan-2006 | Hardware Avail: Dec-2005 | Software Avail: Aug-2005

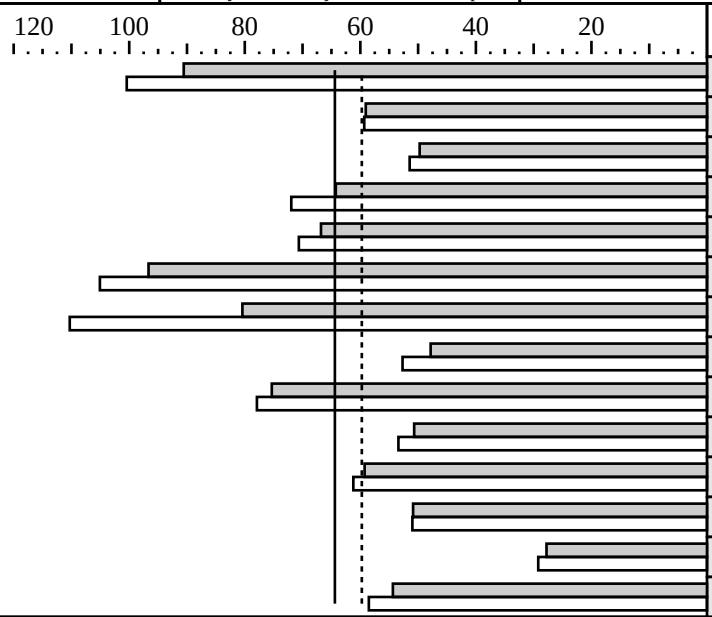


| Benchmark | Base Copies | Base Runtime | Base Ratio | Copies | Runtime | Ratio |
|---|---|---|---|---|---|---|
| 168.wupwise | 4 | 82.0 | 90.6 | 4 | 73.9 | 100 |
| 171.swim | 4 | 244 | 59.1 | 4 | 242 | 59.3 |
| 172.mgrid | 4 | 168 | 49.7 | 4 | 162 | 51.5 |
| 173.applu | 4 | 152 | 64.2 | 4 | 135 | 72.0 |
| 177.mesa | 4 | 97.2 | 66.8 | 4 | 92.0 | 70.6 |
| 178.galgel | 4 | 139 | 96.7 | 4 | 128 | 105 |
| 179.art | 4 | 150 | 80.4 | 4 | 109 | 110 |
| 183.equake | 4 | 126 | 47.8 | 4 | 114 | 52.7 |
| 187.facerec | 4 | 117 | 75.3 | 4 | 113 | 77.9 |
| 188.ammp | 4 | 201 | 50.7 | 4 | 191 | 53.4 |
| 189.lucas | 4 | 157 | 59.3 | 4 | 152 | 61.2 |
| 191.fma3d | 4 | 192 | 50.9 | 4 | 191 | 51.0 |
| 200.sixtrack | 4 | 184 | 27.8 | 4 | 175 | 29.2 |
| 301.apsi | 4 | 222 | 54.4 | 4 | 206 | 58.5 |

### Hardware

| | |
|---|---|
| CPU: | AMD Opteron (TM) 265 processor (1.80 GHz) |
| CPU MHz: | 1800 |
| FPU: | Integrated |
| CPU(s) enabled: | 4 cores, 2 chips, 2 cores/chip |
| CPU(s) orderable: | 1,2 |
| Parallel: | No |
| Primary Cache: | 64KBI + 64KBD on chip, per core |
| Secondary Cache: | 1024KB (I+D) on chip, per core |
| L3 Cache: | N/A |
| Other Cache: | N/A |
| Memory: | 8x2048MB DDR-RAM PC3200R |
| Disk Subsystem: | Western Digital WD2500 (SATA, 7.2krpm) |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | SuSE Linux Enterprise Server 9 (x86_64) SP 2<br>SuSE Kernel 2.6.5-7.191-smp |
| Compiler: | PathScale EKOPath(TM) Compiler Suite, Release 2.2.1 (for C and Fortran)<br>AMD Core Mathematical Library (ACML), Version 2.6.0 |
| File System: | Linux/reiserfs |
| System State: | Multi-user run level 3 |

## Notes/Tuning Information

```
GENERAL
+FDO:  PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library

Portability flags
   178.galgel: -fixedform

Base tuning flags
   for Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
   for C programs:       -Ofast -WOPT:mem_opnds=on +FDO

Peak tuning flags
   168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
   171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation



## Notes/Tuning Information (Continued)

```
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
   173.applu:   -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
   177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                -WOPT:mem_opnds=on +FDO
   178.galgel:  -Ofast -OPT:fast_complex=on +ACML +FDO
   179.art:     -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
   183.equake:  -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
   187.facerec: -Ofast -LNO:fusion=2
                -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
   188.ammp:    -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                -fno-math-errno -TENV:X=4 +FDO
   189.lucas:   -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256
                -WOPT:mem_opnds=on +FDO
   191.fma3d:   -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
   200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
                -fno-math-errno -CG:load_exe=1 +FDO
   301.apsi:    -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2


MYMASK=‘printf ’0x%x’ $((1<<$SPECUSERNUM))‘; /usr/bin/taskset $MYMASK $command:
Taskset utility used to bind process to CPU(s)

BIOS settings: Memory timing=1T

This result was measured with 64-bit binaries using the 64-bit version of
the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```