# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

## Acer Incorporated

Acer Altos R510Mk2 (3.6 GHz Intel Xeon processor, 2MB L2)

SPECint_rate2000 = 21.8

SPECint_rate_base2000 = 21.7

SPEC license #: 97 | Tested by: Acer Incorporated | Test date: Jan-2006 | Hardware Avail: Jan-2006 | Software Avail: Nov-2005

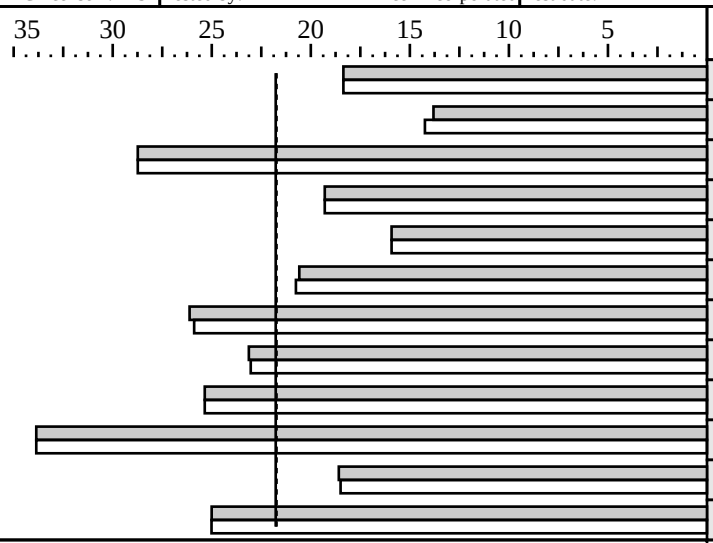


| Benchmark | Base Copies | Base Runtime | Base Ratio | Copies | Runtime | Ratio |
|---|---|---|---|---|---|---|
| 164.gzip | 2 | 177 | 18.4 | 2 | 177 | 18.4 |
| 175.vpr | 2 | 235 | 13.8 | 2 | 228 | 14.2 |
| 176.gcc | 2 | 88.8 | 28.7 | 2 | 88.8 | 28.7 |
| 181.mcf | 2 | 216 | 19.3 | 2 | 216 | 19.3 |
| 186.crafty | 2 | 146 | 15.9 | 2 | 146 | 15.9 |
| 197.parser | 2 | 203 | 20.6 | 2 | 201 | 20.8 |
| 252.eon | 2 | 115 | 26.1 | 2 | 117 | 25.9 |
| 253.perlbmk | 2 | 181 | 23.1 | 2 | 181 | 23.0 |
| 254.gap | 2 | 101 | 25.4 | 2 | 101 | 25.4 |
| 255.vortex | 2 | 130 | 33.9 | 2 | 130 | 33.9 |
| 256.bzip2 | 2 | 187 | 18.6 | 2 | 188 | 18.5 |
| 300.twolf | 2 | 278 | 25.0 | 2 | 278 | 25.0 |

### Hardware

| | |
|---|---|
| CPU: | Intel Xeon (3.6 GHz, 2MB L2, 800MHz system bus) |
| CPU MHz: | 3600 |
| FPU: | Integrated |
| CPU(s) enabled: | 1 core, 1 chip, 1 core/chip(Hyper-Threading Technology enabled) |
| CPU(s) orderable: | 1,2 |
| Parallel: | No |
| Primary Cache: | 12KB(I) micro-ops + 16KB(D) on chip |
| Secondary Cache: | 2048KB(I+D) on chip |
| L3 Cache: | N/A |
| Other Cache: | N/A |
| Memory: | 6 x 512MB ECC DDR2-400 SDRAM |
| Disk Subsystem: | 1 x 160GB 7200RPM SATA HDD |
| Other Hardware: | |

### Software

| | |
|---|---|
| Operating System: | Microsoft Windows Server 2003 Enterprise Edition (Build 3790) |
| Compiler: | Intel C++ Compiler 9.0 Build 20051130Z for IA32<br>Microsoft Visual Studio .Net 2003(7.1.3091, for libraries)<br>shlW32M.lib is Microquill SmartHeap Library Version 7.4 |
| File System: | NTFS |
| System State: | Default |

## Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     basepeak=yes
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   basepeak=yes
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
256.bzip2:   -fast -Oa -Qunroll1 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation



## Notes/Tuning Information (Continued)

```
300.twolf:    -fast  +FDO shlW32M.lib
Enable hardware prefetching and adjacent cache line prefetch BIOS setting
Product description located at http://www.acer.com
```