CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS V830, Opteron (TM) 280, Linux 64-bit

SPECfp2000 = 2096

SPECfp_base2000 = 1902

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jan-2006 | Hardware Avail: Sep-2005 | Software Avail: Dec-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	63.4	2526	53.9	2967
171.swim	3100	125	2482	120	2582
172.mgrid	1800	108	1674	96.8	1859
173.applu	2100	105	1992	93.6	2244
177.mesa	1400	70.9	1975	66.0	2122
178.galgel	2900	93.2	3110	82.8	3504
179.art	2600	103	2516	72.2	3599
183.equake	1300	78.6	1654	72.1	1804
187.facerec	1900	75.3	2523	76.3	2491
188.ammp	2200	152	1448	142	1550
189.lucas	2000	97.9	2042	86.4	2316
191.fma3d	2100	133	1577	132	1595
200.sixtrack	1100	135	814	129	852
301.apsi	2600	164	1582	155	1681

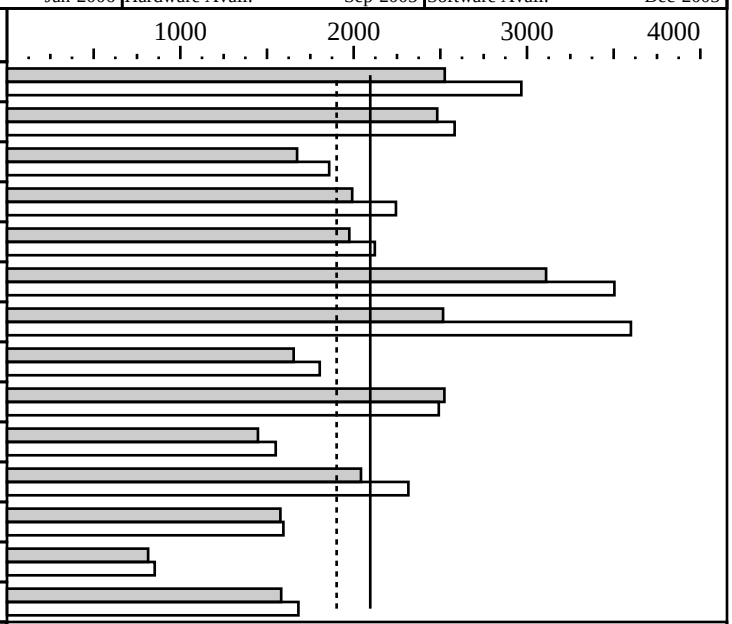

Hardware

CPU:	AMD Opteron 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 x 512 MB PC3200 CL3-3-3 DDR SDRAM
Disk Subsystem:	SCSI U320
Other Hardware:	None

Software

Operating System:	SLES 9 with SP3 (AMD64) - kernel 2.6.5-7.244-smp
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3 (for C and Fortran) AMD Core Mathematical Library (ACML), Version 3.0.0
File System:	Linux/ReiserFS
System State:	Multi-User SuSE Run Level 3

Notes/Tuning Information

```
Portability flags:
   178.galgel: -fixedform

Feedback Optimization:
 +FDO: PASS1=-fb_create fbdata   PASS2=-fb_opt fbdata

AMD Core Math Library
+ACML  means -L<acml-install-dir>/pathscale64/lib -lacml,
        which causes linking with AMD Core Math Library

Baseline Optimization Flags:
   C programs:       -Ofast -WOPT:mem_opnds=on +FDO
   Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO

Peak Tuning Flags:
 168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
               -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -IPA:linear=on:plimit=50000:callee_limit=5000
                -INLINE:aggressive=on
 171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
 172.mgrid:     -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
 173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3
                +FDO
 177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                -WOPT:mem_opnds=on +FDO
 178.galgel:    -Ofast -OPT:fast_complex=on +ACML +FDO RM_SOURCES=lapak.f90
 179.art:       -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
 183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
 187.facerec:   -Ofast -LNO:fusion=2
                -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
 188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                -fno-math-errno -TENV:X=4 +FDO
 189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256
                -WOPT:mem_opnds=on +FDO
 191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
 200.sixtrack:  -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
                -fno-math-errno -CG:load_exe=1 +FDO
 301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2

BIOS default settings with
Node memory interleave disabled, SRAT enabled
taskset has been used to bind processes to CPUs

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```