CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX220, AMD Opteron (TM) 254

SPECfp2000 = 2278

SPECfp_base2000 = 2079

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jan-2006 | Hardware Avail: Dec-2005 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	53.6	2985	48.8	3280
171.swim	3100	118	2625	115	2703
172.mgrid	1800	98.3	1832	90.4	1991
173.applu	2100	97.5	2154	85.3	2462
177.mesa	1400	62.9	2227	59.7	2347
178.galgel	2900	84.4	3434	76.3	3802
179.art	2600	94.3	2757	68.5	3798
183.equake	1300	75.0	1733	67.9	1915
187.facerec	1900	73.1	2600	69.7	2728
188.ammp	2200	133	1650	126	1748
189.lucas	2000	96.6	2070	84.6	2364
191.fma3d	2100	121	1736	121	1736
200.sixtrack	1100	118	928	113	975
301.apsi	2600	149	1744	138	1882

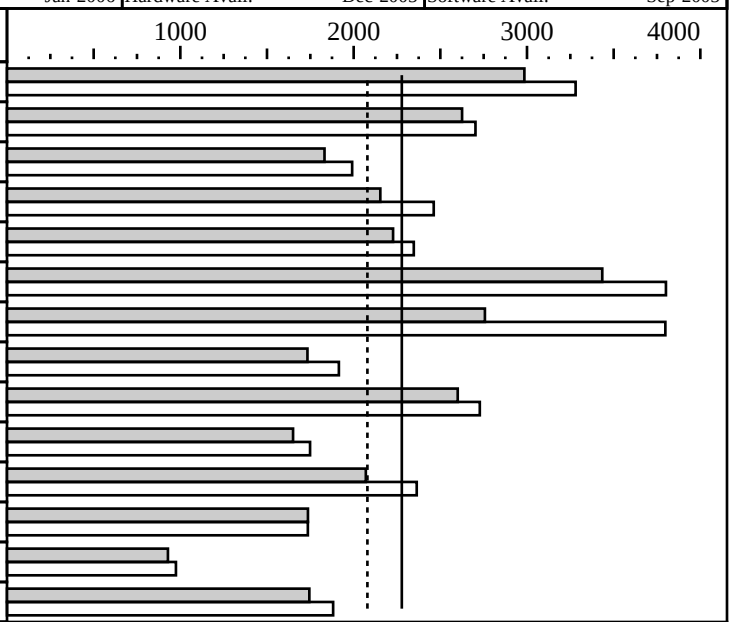

Hardware

CPU:	AMD Opteron (TM) 254 processor (2.80 GHz)
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB DDR-RAM PC3200R CL3-3-3
Disk Subsystem:	Western Digital WD2500 (SATA, 7.2krpm)
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 2 SuSE Kernel 2.6.5-7.191-smp
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.2.1 (for C and Fortran) AMD Core Mathematical Library (ACML), Version 2.6.0
File System:	Linux/reiserfs
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO:  PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library

Portability flags
   178.galgel: -fixedform

Base tuning flags
   for Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
   for C programs:       -Ofast -WOPT:mem_opnds=on +FDO

Peak tuning flags
   168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
   171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
   173.applu:   -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
   177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                -WOPT:mem_opnds=on +FDO
   178.galgel:  -Ofast -OPT:fast_complex=on +ACML +FDO
   179.art:     -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
   183.equake:  -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
   187.facerec: -Ofast -LNO:fusion=2
                -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
   188.ammp:    -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                -fno-math-errno -TENV:X=4 +FDO
   189.lucas:   -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256
                -WOPT:mem_opnds=on +FDO
   191.fma3d:   -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
   200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
                -fno-math-errno -CG:load_exe=1 +FDO
   301.apsi:    -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2


BIOS settings: Memory timing=1T

This result was measured with 64-bit binaries using the 64-bit version of
the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```