CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX630, AMD Opteron (TM) 252

SPECfp2000 = 2192

SPECfp_base2000 = 2000

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jan-2006 | Hardware Avail: Jan-2006 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	56.4	2836	52.5	3050
171.swim	3100	119	2600	115	2688
172.mgrid	1800	103	1753	93.1	1933
173.applu	2100	101	2079	89.2	2355
177.mesa	1400	67.1	2085	62.9	2227
178.galgel	2900	88.0	3294	79.1	3666
179.art	2600	96.5	2695	70.4	3692
183.equake	1300	76.2	1707	69.1	1881
187.facerec	1900	75.4	2521	72.0	2640
188.ammp	2200	141	1563	133	1657
189.lucas	2000	97.5	2052	85.2	2348
191.fma3d	2100	127	1660	126	1662
200.sixtrack	1100	127	865	121	909
301.apsi	2600	156	1668	145	1796

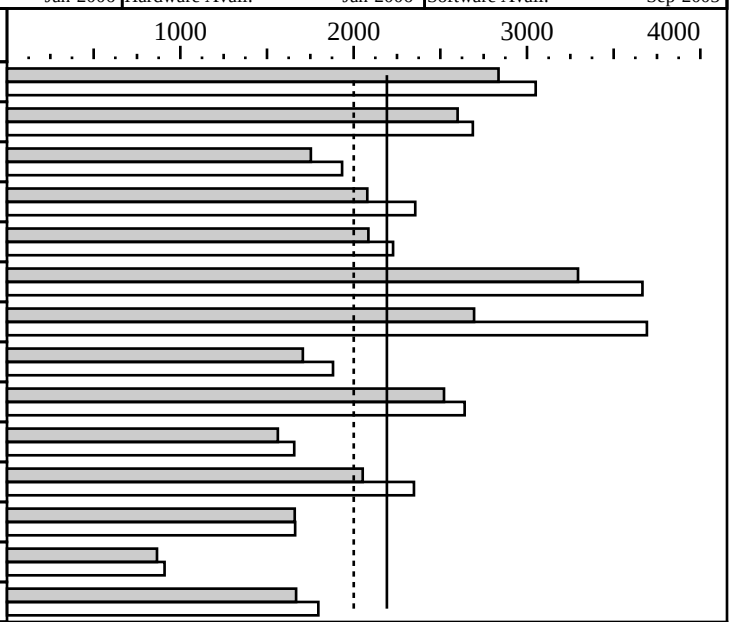

Hardware

CPU:	AMD Opteron (TM) 252 processor (2.60 GHz)
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip, per core
Secondary Cache:	1024KB (I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB DDR-RAM PC3200R CL3-3-3
Disk Subsystem:	Western Digital WD2500 (SATA, 7.2krpm)
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 2 SuSE Kernel 2.6.5-7.191-smp
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.2.1 (for C and Fortran) AMD Core Mathematical Library (ACML), Version 2.6.0
File System:	Linux/reiserfs
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO:  PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library

Portability flags
   178.galgel: -fixedform

Base tuning flags
   for Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
   for C programs:       -Ofast -WOPT:mem_opnds=on +FDO

Peak tuning flags
   168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
   171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
   173.applu:   -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
   177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                -WOPT:mem_opnds=on +FDO
   178.galgel:  -Ofast -OPT:fast_complex=on +ACML +FDO
   179.art:     -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
   183.equake:  -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
   187.facerec: -Ofast -LNO:fusion=2
                -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
   188.ammp:    -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                -fno-math-errno -TENV:X=4 +FDO
   189.lucas:   -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256
                -WOPT:mem_opnds=on +FDO
   191.fma3d:   -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
   200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
                -fno-math-errno -CG:load_exe=1 +FDO
   301.apsi:    -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2


BIOS settings: Memory timing=1T
               DRAM Bank Interleave=AUTO

This result was measured with 64-bit binaries using the 64-bit version of
the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```