CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX630, AMD Opteron (TM) 252

SPECfp_rate2000 = 49.1

SPECfp_rate_base2000 = 44.9

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jan-2006 | Hardware Avail: Jan-2006 | Software Avail: Apr-2005

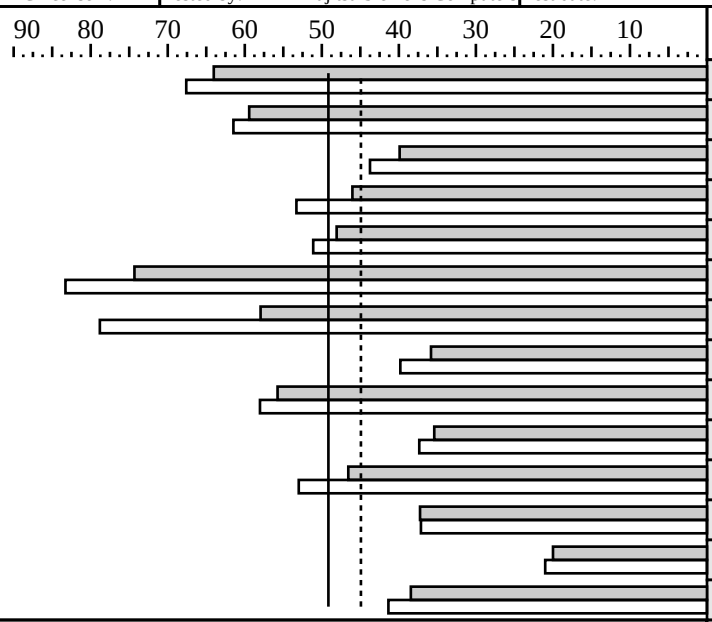

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	58.0	64.0	2	54.9	67.6
171.swim	2	121	59.4	2	117	61.5
172.mgrid	2	105	39.9	2	95.5	43.7
173.applu	2	106	46.0	2	91.4	53.3
177.mesa	2	67.6	48.1	2	63.5	51.1
178.galgel	2	90.5	74.3	2	80.8	83.3
179.art	2	104	57.9	2	76.5	78.8
183.equake	2	84.2	35.8	2	75.8	39.8
187.facerec	2	79.1	55.7	2	76.0	58.0
188.ammp	2	144	35.4	2	137	37.3
189.lucas	2	99.7	46.6	2	87.6	53.0
191.fma3d	2	131	37.2	2	131	37.1
200.sixtrack	2	128	20.0	2	122	21.0
301.apsi	2	157	38.4	2	146	41.4

Hardware

CPU:	AMD Opteron (TM) 252 processor (2.60 GHz)
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip, per core
Secondary Cache:	1024KB (I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2048MB DDR-RAM PC3200R CL3-3-3
Disk Subsystem:	Western Digital WD2500 (SATA, 7.2krpm)
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 2 SuSE Kernel 2.6.5-7.191-smp
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.2.1 (for C and Fortran) AMD Core Mathematical Library (ACML), Version 2.6.0
File System:	Linux/reiserfs
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO:  PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library

Portability flags
   178.galgel: -fixedform

Base tuning flags
   for Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
   for C programs:       -Ofast -WOPT:mem_opnds=on +FDO

Peak tuning flags
   168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
   171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
   173.applu:   -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
   177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                -WOPT:mem_opnds=on +FDO
   178.galgel:  -Ofast -OPT:fast_complex=on +ACML +FDO
   179.art:     -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
   183.equake:  -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
   187.facerec: -Ofast -LNO:fusion=2
                -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
   188.ammp:    -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                -fno-math-errno -TENV:X=4 +FDO
   189.lucas:   -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256
                -WOPT:mem_opnds=on +FDO
   191.fma3d:   -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
   200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
                -fno-math-errno -CG:load_exe=1 +FDO
   301.apsi:    -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2


MYMASK=‘printf ’0x%x’ $((1<<$SPECUSERNUM))‘; /usr/bin/taskset $MYMASK $command:
Taskset utility used to bind process to CPU(s)

BIOS settings: Memory timing=1T
               DRAM Bank Interleave=AUTO

This result was measured with 64-bit binaries using the 64-bit version of
the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```