CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX630, AMD Opteron (TM) 254

SPECint2000 = 1947

SPECint_base2000 = 1788

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jan-2006 | Hardware Avail: Feb-2006 | Software Avail: Mar-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	91.3	1533	91.3	1533
175.vpr	1400	94.2	1487	91.3	1534
176.gcc	1100	53.7	2050	53.9	2042
181.mcf	1800	150	1204	124	1457
186.crafty	1000	55.0	1820	50.3	1989
197.parser	1800	104	1737	104	1737
252.eon	1300	59.9	2171	42.5	3060
253.perlbmk	1800	98.4	1829	90.5	1989
254.gap	1100	56.5	1945	56.5	1945
255.vortex	1900	66.7	2848	60.8	3125
256.bzip2	1500	103	1458	101	1490
300.twolf	3000	161	1867	135	2229

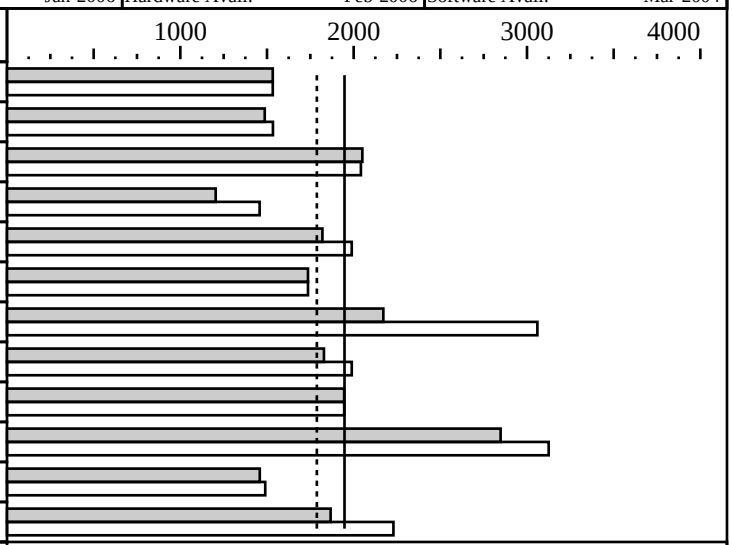

Hardware

CPU:	AMD Opteron (TM) 254 processor (2.80 GHz)
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip, per core
Secondary Cache:	1024KB (I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB DDR-RAM PC3200R CL3-3-3
Disk Subsystem:	Western Digital WD2500 (SATA, 7.2krpm)
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1
Compiler:	Intel C++ 8.0 Build 20040318Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1= -Qprof_gen  PASS2= -Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast -arch:SSE2 -Oi- +FDO
   for C++ programs: -fast -GX -GR +FDO

Peak tuning flags
   164.gzip:    basepeak=yes
   175.vpr:     -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000,
                -ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
   176.gcc:     -fast -arch:SSE2 -Oi- -Qunroll3 +FDO shlw32M.lib
   181.mcf:     -fast -QaxN +FDO shlw32M.lib
   186.crafty:  -fast -arch:SSE2 +FDO ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    197.parser:  basepeak=yes
    252.eon:     -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000,
                 -ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes shlw32M.lib
    253.perlbmk: -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes shlw32M.lib
    254.gap:     basepeak=yes
    255.vortex:  -fast -arch:SSE -Oi- -Qoption,c,-ip_ninl_max_stats=2000,
                 -ip_ninl_max_total_stats=4500 +FDO shlw32M.lib
    256.bzip2:   -fast -Qunroll2 shlw32M.lib
    300.twolf:   -fast -arch:SSE2 -Qansi_alias +FDO ONESTEP=yes shlw32M.lib


boot options:  /Execute /NOPAE
               /USEPMTIMER
BIOS settings: Memory Timing: 1T
               DRAM Bank Interleave=AUTO

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```