CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Ultra 40

SPECint_rate2000 = 71.2

SPECint_rate_base2000 = 66.3

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Feb-2006 | Hardware Avail: Jan-2006 | Software Avail: Nov-2005

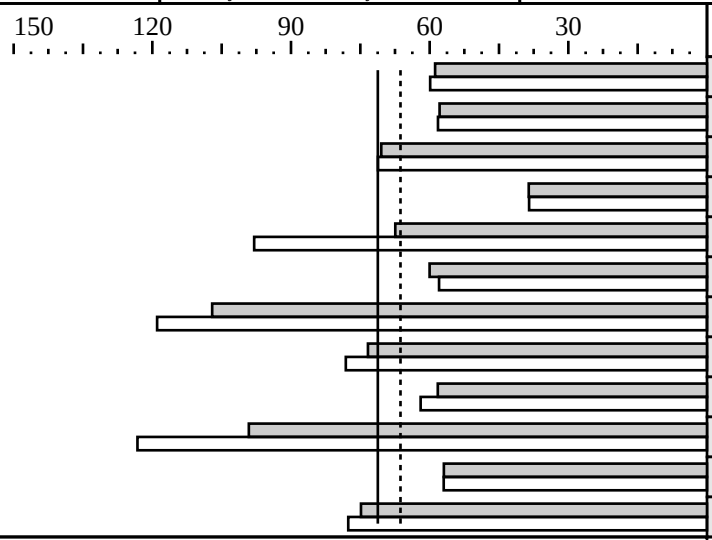

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	110	58.8	4	108	59.9
175.vpr	4	112	57.9	4	112	58.2
176.gcc	4	72.4	70.5	4	71.7	71.2
181.mcf	4	217	38.6	4	217	38.5
186.crafty	4	68.8	67.4	4	47.4	98.0
197.parser	4	139	60.0	4	144	58.0
252.eon	4	56.3	107	4	50.7	119
253.perlbmk	4	114	73.4	4	107	78.1
254.gap	4	87.6	58.2	4	82.4	62.0
255.vortex	4	88.9	99.1	4	71.5	123
256.bzip2	4	122	56.9	4	122	57.0
300.twolf	4	186	74.9	4	179	77.6

Hardware

CPU:	AMD Opteron (TM) 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 (order by # of chips)
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16GB (8x2GB, PC3200 CL3 DDR ECC Registered SDRAM)
Disk Subsystem:	SATA,250GB,7200 RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 3/05 HW2
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

FDO:  PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
      fdo_pre0:  rm -rf ./feedback.profile

Integer base flags:
     Base tuning for C programs  : -fast  -xcrossfile -xalias_level=std +FDO ONESTEP=yes
     Base tuning for C++ programs: -fast  -xcrossfile -xarch=amd64 +FDO ONESTEP=yes

Integer peak flags:
 ONESTEP=yes +FDO for all benchmarks

 164.gzip:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 175.vpr:     -fast -xpagesize=2m -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign -lmopt -lm
 176.gcc:     -fast -xipo=2 -Wd,-iropt-prof -xalias_level=strong -xrestrict
 181.mcf:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 186.crafty:  -fast -xrestrict -xipo=2 -xprefetch -xarch=amd64 -xpagesize=2m
               -M /usr/lib/ld/map.bssalign -Wd,-iropt-prof -W2,-Ashort_ldst:ldld
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                  -W2,-Ainline:rs=50
 197.parser:   -fast -xpagesize=2m -xipo=2 -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign
 252.eon:      -fast -xipo=2 -qoption CC -iropt-prof -xvector -qoption iropt -Abcopy -xalias_level
                 -xarch=amd64 -xrestrict -Qoption ube -xcallee=yes -xregs=frameptr
 253.perlbmk:  -fast -xcrossfile  -M /usr/lib/ld/map.bssalign -lbsdmalloc
 254.gap:      -fast -xipo=2 -Wd,-iropt-prof -xvector -W2,-Abcopy -lbsdmalloc -xprefetch
                 -W2,-Ainline:cp=5:rs=1300:irs=3300:inc=100 -W2,-Arestrict_g
 255.vortex:  -fast -xipo=2 -Wd,-iropt-prof -lbsdmalloc -xrestrict -xprefetch -M /usr/lib/ld/map.bssalign
 256.bzip2:    -fast -xpagesize=2m -xcrossfile -xarch=sse2 -Xc -M /usr/lib/ld/map.bssalign -lbsdmalloc
 300.twolf:    -fast -xipo=2 -Wd,-iropt-prof -xrestrict -M /usr/lib/ld/map.bssalign

Portability:
 186.crafty (base):  -DSOLARIS_X86
 186.crafty (peak):  -DSOLARIS_X64
 252.eon:     -DSPEC_CPU2000_LP64 -DUSE_STRERROR
 253.perlbmk: -DSPEC_CPU2000_SOLARIS_X86
 254.gap:     -DSYS_IS_USG -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

Processes were bound to CPUs using submit=pbind

Default BIOS setting was used
```