CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM

AMD Opteron LS20 for IBM eServer Blade Center (Opteron(tm) 254)

SPECfp2000 = 2220

SPECfp_base2000 = 2009

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Feb-2006 | Hardware Avail: Feb-2006 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	58.3	2746	53.5	2990
171.swim	3100	122	2533	117	2659
172.mgrid	1800	99.1	1817	92.7	1941
173.applu	2100	98.1	2140	88.8	2365
177.mesa	1400	63.7	2198	60.3	2321
178.galgel	2900	88.3	3284	79.5	3647
179.art	2600	97.9	2657	68.4	3800
183.equake	1300	78.3	1660	70.7	1838
187.facerec	1900	73.2	2597	70.2	2706
188.ammp	2200	135	1625	128	1723
189.lucas	2000	99.6	2007	88.7	2254
191.fma3d	2100	129	1634	123	1707
200.sixtrack	1100	136	811	113	975
301.apsi	2600	144	1805	139	1876

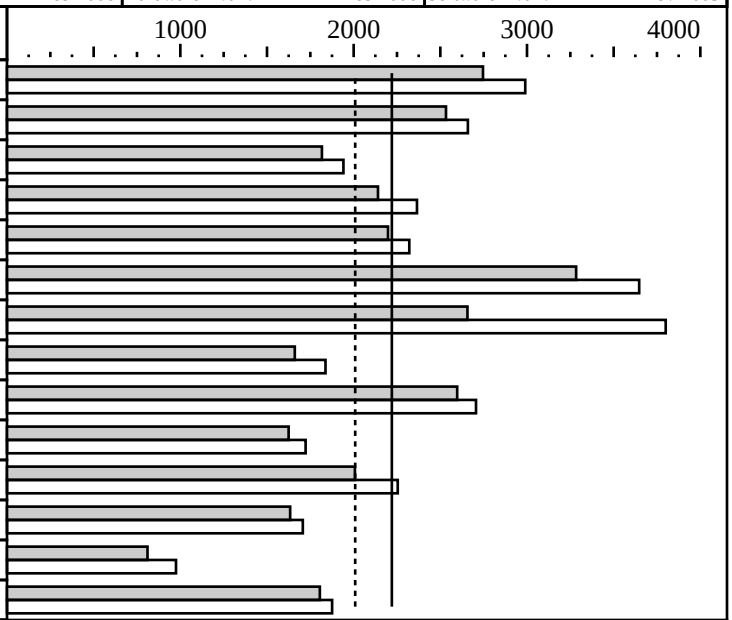

Hardware

CPU:	AMD Opteron(tm) Processor 254
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 x 2048GB PC3200
Disk Subsystem:	SCSI, 36GB 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP2 SLES 64 bit Kernel 2.6.5-7.191-smp (SP2)
Compiler:	PathScale EKO Compiler Suite, Release 2.2.1 AMD Core Math Library 2.5.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 +ACML: Linked with AMD Core Math Library
 Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
 Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex
 Portability flags:
   178.galgel:    -fixedform
 Peak tuning:
   168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                  -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                  -IPA:linear=on:plimit=50000:callee_limit=5000
                  -INLINE:aggressive=on
   171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:     -Ofast -CG:gcm=off:cflow=on -OPT:IEEE_a=3:unroll_size=200
                  -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
      -WOPT:memopnds=on:aggstr=0
   173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                  -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
    178.galgel:    -Ofast -OPT:fast_complex +ACML
    179.art:       -O3 -OPT:ofast -fno-math-errno -mno-sse2 -m32 +FDO
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32
    187.facerec:   -Ofast -LNO:fusion=2 -IPA:plimit=1500
                   -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 -LNO:prefetch=0 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:memopnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=60000:early_intrinsics=on
       -fno-math-errno -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Taskset utility used to bind process to CPU(s)
```