CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon 5080 processor, 3.73 GHz

SPECfp_rate2000 = 38.0

SPECfp_rate_base2000 = 38.0

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Feb-2006 | Hardware Avail: Jun-2006 | Software Avail: Jan-2006

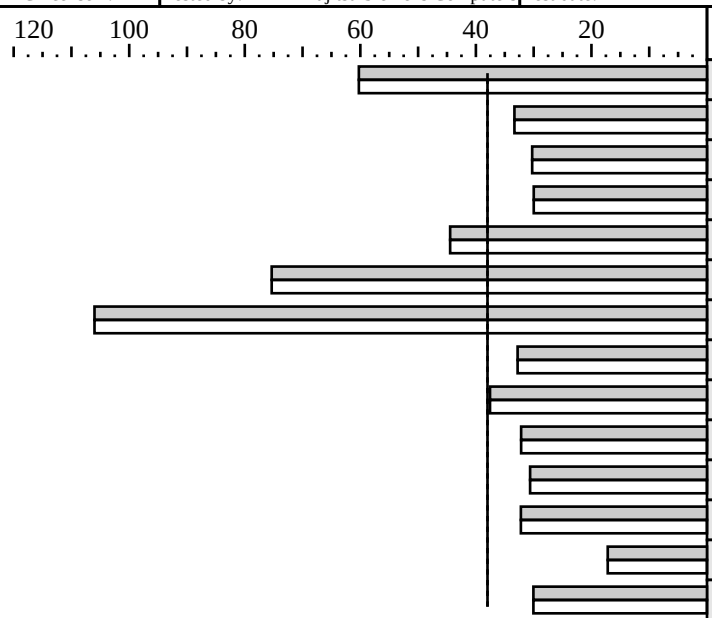

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	61.6	60.3	2	61.6	60.3
171.swim	2	216	33.3	2	216	33.3
172.mgrid	2	138	30.3	2	138	30.3
173.applu	2	162	30.0	2	162	30.0
177.mesa	2	73.1	44.5	2	73.1	44.5
178.galgel	2	89.3	75.3	2	89.3	75.3
179.art	2	56.9	106	2	56.9	106
183.equake	2	92.0	32.8	2	92.0	32.8
187.facerec	2	117	37.6	2	117	37.6
188.ammp	2	159	32.2	2	159	32.2
189.lucas	2	152	30.6	2	152	30.6
191.fma3d	2	151	32.2	2	151	32.2
200.sixtrack	2	149	17.2	2	149	17.2
301.apsi	2	201	30.0	2	201	30.0

Hardware

CPU:	Intel Xeon 5080 processor (3.73 GHz, 2x2MB SLC, 1066 MHz system bus)
CPU MHz:	3733
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip, per core
Secondary Cache:	2048KB(I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024 MB DDRII-RAM PC2-4200F (CAS 4-4-4)
Disk Subsystem:	Seagate ST336754SS (SAS, 15.4krpm, 36GB)
Other Hardware:	none

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 9 with SP3 Kernel 2.6.5-7.244-smp on x86_64
Compiler:	Intel C++ and Fortran Compiler 9.0 for EM64T Build 20060120 (for 64-bit applications)
File System:	ext3
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO implies feedback-directed optimization
PASS1: -prof_gen  PASS2: -prof_use

Optimization flags
ONESTEP=yes set for all benchmarks

Portability flags
-DSPEC_CPU2000_LP64 applied to all benchmarks
178.galgel: -FI for fixed-format Fortran

Base tuning flags
   for Fortran and C programs: -fast +FDO

Peak tuning flags
   same as baseline (basepeak=true set globally)
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

The system bus runs at 1066 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries