CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL25p (AMD Opteron (TM) 285)

SPECfp2000 = 2132

SPECfp_base2000 = 1937

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Feb-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	59.8	2674	53.2	3008
171.swim	3100	127	2447	122	2538
172.mgrid	1800	105	1719	95.9	1876
173.applu	2100	104	2014	91.8	2288
177.mesa	1400	66.2	2114	61.4	2279
178.galgel	2900	91.1	3184	80.9	3584
179.art	2600	104	2511	71.4	3642
183.equake	1300	81.3	1599	73.6	1767
187.facerec	1900	75.1	2530	75.3	2524
188.ammp	2200	145	1514	135	1627
189.lucas	2000	104	1931	91.1	2195
191.fma3d	2100	129	1622	129	1632
200.sixtrack	1100	126	871	121	910
301.apsi	2600	159	1635	150	1735

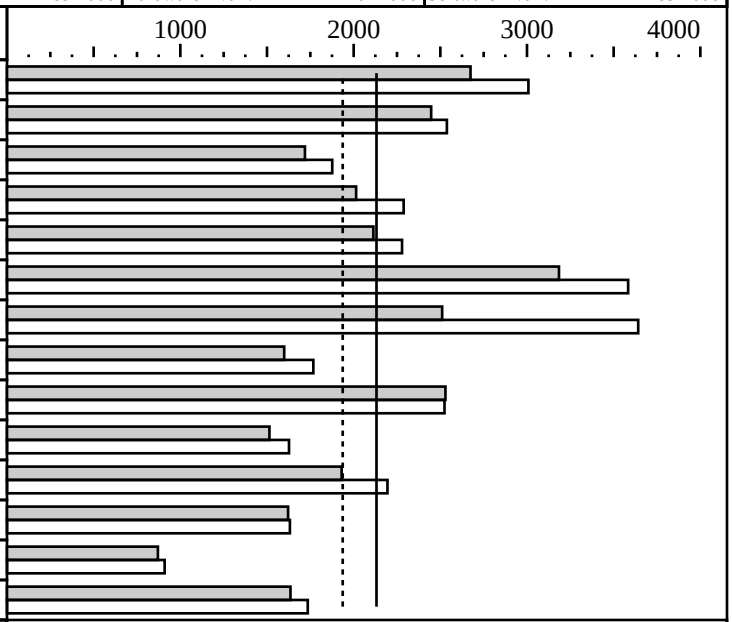

Hardware

CPU:	AMD Opteron (TM) 285
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 3 SuSE kernel 2.6.5-7.244-default
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3 AMD Core Math Library 3.0.0
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
  171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:     -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
               -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2 -WOPT:mem_opnds=on:aggstr=0
  173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                 -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
  177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                  -WOPT:mem_opnds=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    178.galgel:    -Ofast -OPT:fast_complex-on RM_SOURCES=lapak.f90 +ACML +FDO
    179.art:       -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
    187.facerec:   -Ofast -LNO:fusion=2 -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on -fno-math-errno
                   -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Single-processor kernel was used
```