CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 285)

SPECfp_rate2000 = 21.8

SPECfp_rate_base2000 = 20.1

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Feb-2006

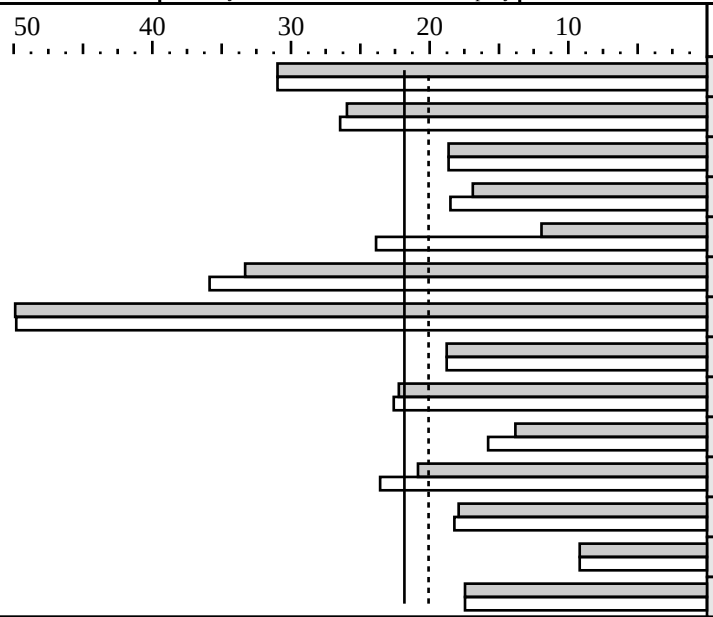

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	59.9	31.0	1	59.9	31.0
171.swim	1	138	26.0	1	136	26.5
172.mgrid	1	112	18.6	1	112	18.6
173.applu	1	144	16.9	1	132	18.5
177.mesa	1	136	11.9	1	68.0	23.9
178.galgel	1	101	33.3	1	93.8	35.9
179.art	1	60.5	49.9	1	60.5	49.8
183.equake	1	80.3	18.8	1	80.3	18.8
187.facerec	1	99.2	22.2	1	97.6	22.6
188.ammp	1	185	13.8	1	162	15.8
189.lucas	1	111	20.8	1	98.4	23.6
191.fma3d	1	136	17.9	1	134	18.2
200.sixtrack	1	139	9.18	1	139	9.18
301.apsi	1	173	17.5	1	173	17.5

Hardware

CPU:	AMD Opteron (TM) 285
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.0 Build 20060120Z) Intel Fortran Compiler for 32-bit applications, (Version 9.0 build 20060120Z) PGI Fortran compiler 6.0-4 for Windows XP (32-bit) PGI C compiler 6.0-4 for Windows XP (32-bit) Microsoft Visual Studio .NET 7.0.9466 (for libraries) AMD Core Math Library V3.0.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
 +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use (Intel compiler)
 +FDO*: PASS1=-Mpfi  PASS2=-Mpfo (PGI compiler)
 +ACML is linking with AMD Core Math Library V3.0.0
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler; and
 pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:       pgcc  -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO* ONESTEP=1
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
 168.wupwise:       pgf90 basepeak=yes
 171.swim:          ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0 ONESTEP=1
 172.mgrid:         pgf90 basepeak=yes
 173.applu:         ifort -Qipo  -O3  -QaxN -QxW +FDO -auto ONESTEP=1
 177.mesa:         icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias ONESTEP=1
                        -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:       pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML ONESTEP=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 179.art:           pgcc  -fastsse -Mipa=fast,inline
 183.equake:        icl   basepeak=yes
 187.facerec:       ifort -Qipo            -QxW +FDO -Qunroll3 ONESTEP=1
                        -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
 188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias ONESTEP=1
 189.lucas:         ifort -Qipo            -QxW      -Qunroll1 ONESTEP=1
 191.fma3d:         ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias- ONESTEP=1
 200.sixtrack:      pgf90 basepeak=yes
 301.apsi:          pgf90 basepeak=yes
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```