CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL35p (AMD Opteron (TM) 280)

SPECfp2000 = 2024

SPECfp_base2000 = 1846

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Jan-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	63.1	2534	55.9	2863
171.swim	3100	128	2426	121	2558
172.mgrid	1800	111	1622	101	1790
173.applu	2100	109	1925	96.2	2183
177.mesa	1400	71.4	1961	66.1	2119
178.galgel	2900	96.5	3005	86.6	3350
179.art	2600	107	2437	75.5	3443
183.equake	1300	83.6	1555	76.4	1702
187.facerec	1900	77.6	2450	78.3	2427
188.ammp	2200	156	1411	146	1506
189.lucas	2000	106	1887	95.0	2106
191.fma3d	2100	137	1533	136	1539
200.sixtrack	1100	137	805	131	842
301.apsi	2600	169	1543	159	1635

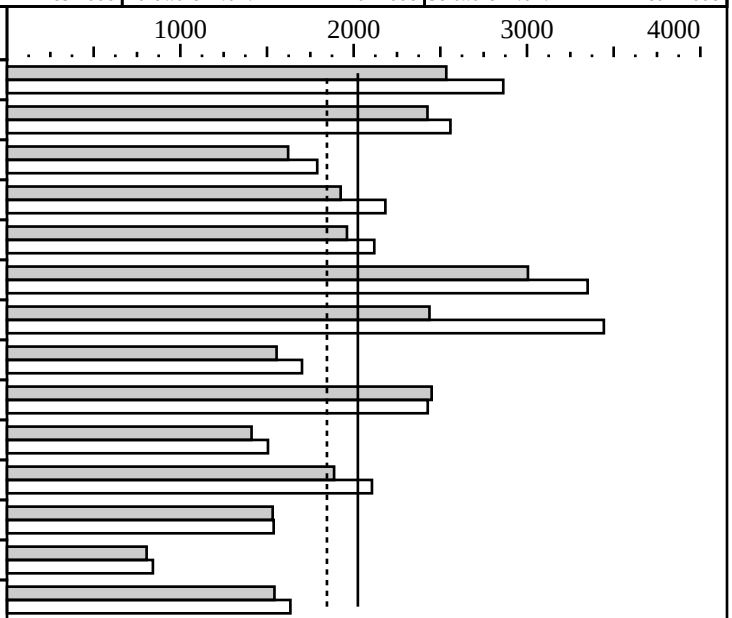

Hardware

CPU:	AMD Opteron (TM) 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 3 SuSE kernel 2.6.5-7.244-default
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3 AMD Core Math Library 2.5.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
  171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:     -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
               -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2 -WOPT:mem_opnds=on:aggstr=0
  173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                 -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
  177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                  -WOPT:mem_opnds=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    178.galgel:    -Ofast -OPT:fast_complex-on RM_SOURCES=lapak.f90 +ACML +FDO
    179.art:       -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
    187.facerec:   -Ofast -LNO:fusion=2 -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on -fno-math-errno
                   -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Single-processor kernel was used
```