CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Ultra 40

SPECint2000 = 1957

SPECint_base2000 = 1783

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Mar-2006 | Hardware Avail: Apr-2006 | Software Avail: Jan-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	88.7	1579	86.7	1616
175.vpr	1400	94.8	1477	88.5	1581
176.gcc	1100	53.1	2072	52.5	2095
181.mcf	1800	156	1151	147	1221
186.crafty	1000	55.1	1815	38.8	2574
197.parser	1800	117	1535	117	1543
252.eon	1300	44.5	2922	40.3	3229
253.perlbmk	1800	91.7	1963	85.8	2098
254.gap	1100	70.2	1567	64.2	1714
255.vortex	1900	72.9	2608	57.0	3333
256.bzip2	1500	103	1451	97.8	1533
300.twolf	3000	153	1964	146	2050

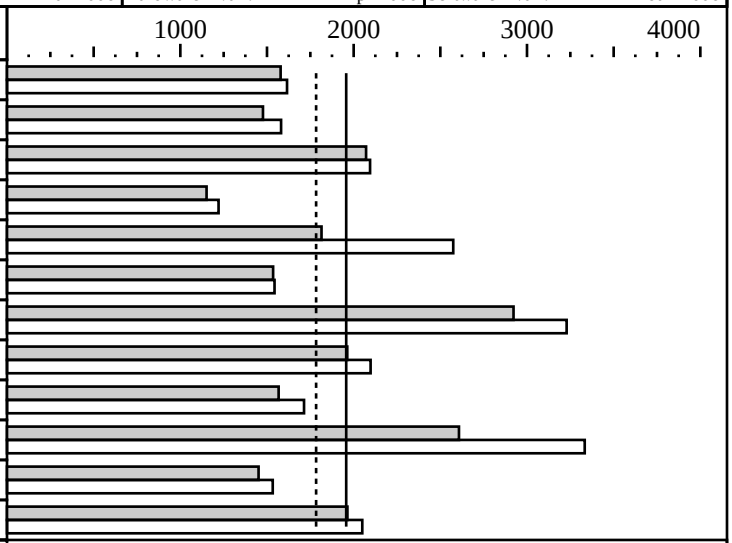

Hardware

CPU:	AMD Opteron (TM) 256
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (4x2GB, PC3200 CL3 DDR ECC Registered SDRAM)
Disk Subsystem:	SATA,250GB,7200RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 1/06
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

FDO:  PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
      fdo_pre0:  rm -rf ./feedback.profile

Integer base flags:
     Base tuning for C programs  : -fast  -xcrossfile -xalias_level=std +FDO ONESTEP=yes
     Base tuning for C++ programs: -fast  -xcrossfile -xarch=amd64 +FDO ONESTEP=yes

Integer peak flags:
 ONESTEP=yes +FDO for all benchmarks

 164.gzip:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 175.vpr:     -fast -xpagesize=2m -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign -lmopt -lm
 176.gcc:      -fast -xipo=2 -Wd,-iropt-prof -xalias_level=strong -xrestrict
 181.mcf:      -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 186.crafty:   -fast -xrestrict -xipo=2 -xprefetch -xarch=amd64 -xpagesize=2m
                -M /usr/lib/ld/map.bssalign -Wd,-iropt-prof -W2,-Ashort_ldst:ldld
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -W2,-Ainline:rs=50
 197.parser:   -fast -xpagesize=2m -xipo=2 -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign
 252.eon:      -fast -xipo=2 -qoption CC -iropt-prof -xvector -qoption iropt -Abcopy -xalias_level
                -xarch=amd64 -xrestrict -Qoption ube -xcallee=yes -xregs=frameptr
 253.perlbmk:  -fast -xcrossfile  -M /usr/lib/ld/map.bssalign -lbsdmalloc
 254.gap:      -fast -xipo=2 -Wd,-iropt-prof -xvector -W2,-Abcopy -lbsdmalloc -xprefetch
                -W2,-Ainline:cp=5:rs=1300:irs=3300:inc=100 -W2,-Arestrict_g
 255.vortex:  -fast -xipo=2 -Wd,-iropt-prof -lbsdmalloc -xrestrict -xprefetch -M /usr/lib/ld/map.bssalign
 256.bzip2:    -fast -xpagesize=2m -xcrossfile -xarch=sse2 -Xc -M /usr/lib/ld/map.bssalign -lbsdmalloc
 300.twolf:    -fast -xipo=2 -Wd,-iropt-prof -xrestrict -M /usr/lib/ld/map.bssalign

Portability:
 186.crafty (base):  -DSOLARIS_X86
 186.crafty (peak):  -DSOLARIS_X64
 252.eon:     -DSPEC_CPU2000_LP64 -DUSE_STRERROR
 253.perlbmk: -DSPEC_CPU2000_SOLARIS_X86
 254.gap:     -DSYS_IS_USG -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

System was tested in 1 chips configuration
Default BIOS setting was used
```