CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECint2000 = 1940

SPECint_base2000 = 1761

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Mar-2006 | Hardware Avail: May-2006 | Software Avail: Jan-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	89.4	1566	87.2	1605
175.vpr	1400	97.0	1443	89.6	1563
176.gcc	1100	53.9	2042	53.3	2066
181.mcf	1800	162	1108	151	1194
186.crafty	1000	55.5	1801	38.4	2601
197.parser	1800	118	1520	117	1533
252.eon	1300	44.8	2904	40.3	3226
253.perlbmk	1800	92.4	1948	86.5	2082
254.gap	1100	70.4	1562	64.7	1699
255.vortex	1900	73.2	2594	58.0	3274
256.bzip2	1500	105	1422	98.7	1520
300.twolf	3000	154	1942	148	2025

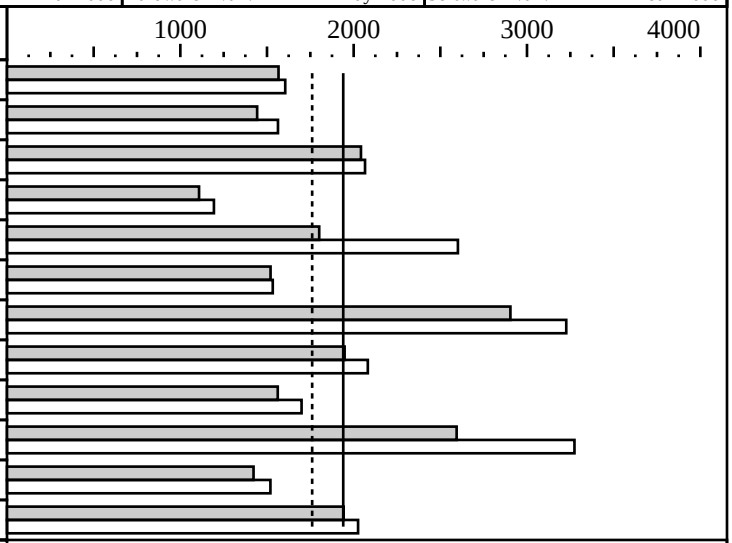

Hardware

CPU:	AMD Opteron (TM) 256
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2 (order by # of chips)
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (4x2GB, PC3200 CL3 DDR ECC Registered SDRAM)
Disk Subsystem:	SAS,36GB,10K RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 1/06
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

FDO:  PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
      fdo_pre0:  rm -rf ./feedback.profile

Integer base flags:
     Base tuning for C programs  : -fast  -xcrossfile -xalias_level=std +FDO ONESTEP=yes
     Base tuning for C++ programs: -fast  -xcrossfile -xarch=amd64 +FDO ONESTEP=yes

Integer peak flags:
 ONESTEP=yes +FDO for all benchmarks

 164.gzip:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 175.vpr:     -fast -xpagesize=2m -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign -lmopt -lm
 176.gcc:      -fast -xipo=2 -Wd,-iropt-prof -xalias_level=strong -xrestrict
 181.mcf:      -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 186.crafty:   -fast -xrestrict -xipo=2 -xprefetch -xarch=amd64 -xpagesize=2m
                -M /usr/lib/ld/map.bssalign -Wd,-iropt-prof -W2,-Ashort_ldst:ldld
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -W2,-Ainline:rs=50
 197.parser:   -fast -xpagesize=2m -xipo=2 -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign
 252.eon:      -fast -xipo=2 -qoption CC -iropt-prof -xvector -qoption iropt -Abcopy -xalias_level
                -xarch=amd64 -xrestrict -Qoption ube -xcallee=yes -xregs=frameptr
 253.perlbmk:  -fast -xcrossfile  -M /usr/lib/ld/map.bssalign -lbsdmalloc
 254.gap:      -fast -xipo=2 -Wd,-iropt-prof -xvector -W2,-Abcopy -lbsdmalloc -xprefetch
                -W2,-Ainline:cp=5:rs=1300:irs=3300:inc=100 -W2,-Arestrict_g
 255.vortex:  -fast -xipo=2 -Wd,-iropt-prof -lbsdmalloc -xrestrict -xprefetch -M /usr/lib/ld/map.bssalign
 256.bzip2:    -fast -xpagesize=2m -xcrossfile -xarch=sse2 -Xc -M /usr/lib/ld/map.bssalign -lbsdmalloc
 300.twolf:    -fast -xipo=2 -Wd,-iropt-prof -xrestrict -M /usr/lib/ld/map.bssalign

Portability:
 186.crafty (base):  -DSOLARIS_X86
 186.crafty (peak):  -DSOLARIS_X64
 252.eon:     -DSPEC_CPU2000_LP64 -DUSE_STRERROR
 253.perlbmk: -DSPEC_CPU2000_SOLARIS_X86
 254.gap:     -DSYS_IS_USG -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

System was tested in 1 chips configuration

Default BIOS setting was used

This result was measured on the Sun Fire X4200.  In addition,
Sun has submitted the same result for the Sun Fire X4100, which is
electronically equivalent to the Sun Fire X4200.
```