CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX100 S3, Intel Pentium 4 631 processor, 3.0 GHz

SPECint2000 = 1505

SPECint_base2000 = 1505

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Mar-2006 | Hardware Avail: May-2006 | Software Avail: Oct-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	139	1011	139	1011
175.vpr	1400	135	1037	135	1037
176.gcc	1100	61.1	1800	61.1	1800
181.mcf	1800	92.5	1945	92.5	1945
186.crafty	1000	89.5	1118	89.5	1118
197.parser	1800	142	1270	142	1270
252.eon	1300	68.7	1893	68.7	1893
253.perlbmk	1800	98.4	1829	98.4	1829
254.gap	1100	66.6	1652	66.6	1652
255.vortex	1900	73.5	2586	73.5	2586
256.bzip2	1500	130	1151	130	1151
300.twolf	3000	197	1521	197	1521

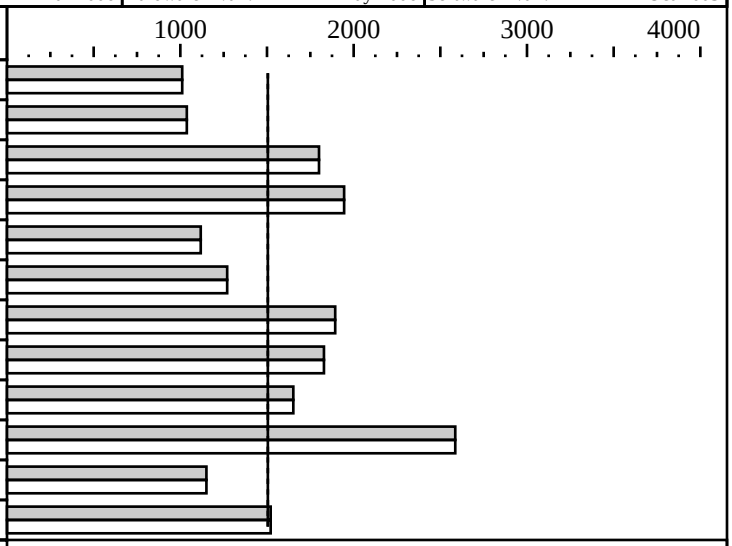

Hardware

CPU:	Intel Pentium 4 631 processor (3.0 GHz, 2MB L2, 800 MHz system bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2GB DDRII-RAM PC2-4200E (CAS 4-4-4)
Disk Subsystem:	Seagate ST380013AS (SATA, 7.2krpm, 80GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1
Compiler:	Intel C++ Compiler 9.0 Build 20051020Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafy:   -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 800 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries