CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL20p G4 (3.0GHz, Intel Xeon processor 5160)

SPECfp2000 = 3008

SPECfp_base2000 = 2769

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	39.2	4082	39.2	4082
171.swim	3100	109	2845	106	2930
172.mgrid	1800	92.2	1953	76.0	2367
173.applu	2100	97.7	2149	71.2	2949
177.mesa	1400	45.3	3092	41.6	3366
178.galgel	2900	41.6	6977	41.6	6977
179.art	2600	21.8	11926	21.8	11926
183.equake	1300	58.5	2221	47.1	2760
187.facerec	1900	63.2	3006	48.3	3936
188.ammp	2200	102	2155	102	2155
189.lucas	2000	96.1	2080	95.6	2093
191.fma3d	2100	97.6	2151	97.6	2151
200.sixtrack	1100	96.0	1146	96.0	1146
301.apsi	2600	155	1681	148	1760

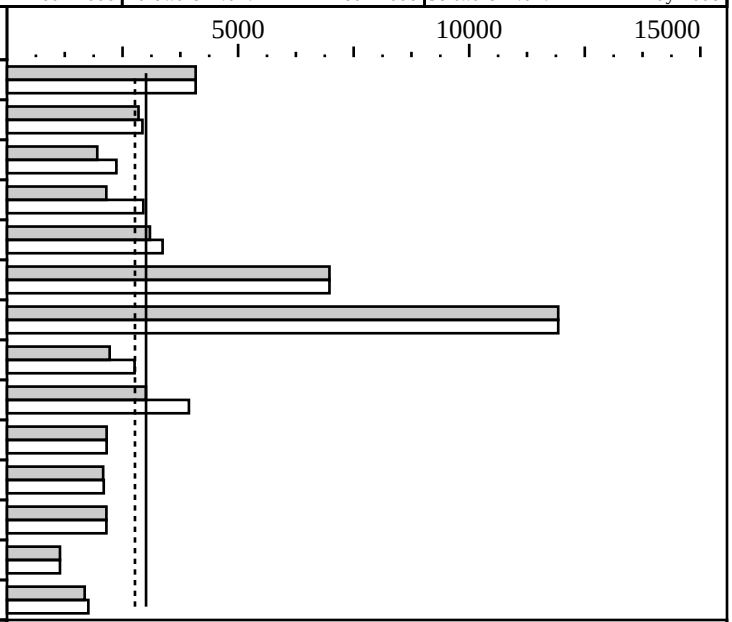

Hardware

CPU:	Intel Xeon processor 5160 (3.0GHz, 4MB L2 shared, 1333MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32KB (I) + 32KB (D) (on chip) per core
Secondary Cache:	4096KB(I+D) (on chip) shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024MB PC2-5300F
Disk Subsystem:	1x36GB 10K SAS
Other Hardware:	

Software

Operating System:	RedHat Enterprise Linux 4.0 Advanced Server for AMD/EM64T, Update 3 Kernel 2.6.9-34.EL
Compiler:	Intel C++ Compiler for EM64T-based applications, (Version 9.1 Build 20060323) Intel Fortran Compiler for EM64T-based applications, (Version 9.1 Build 20060323) PathScale EKOPath(TM) Compiler Suite, Release 2.4
File System:	ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -prof_gen  PASS2=-prof_use (Intel Compiler)
+FDO: PASS1= -fb_create fbdata PASS2=-fb_opt fbdata (PathScale Compiler)
ifort is the Intel Fortran compiler, icc is the Intel C++ compiler; and
pathf95 is PathScale Fortran compiler, pathcc is the PathScale C compiler.
Base tuning for C programs:  icc -fast -auto_ilp32 +FDO
Base tuning for FORTRAN programs:  ifort -fast +FDO
Portability:
  -DSPEC_CPU2000_LP64 applied to all benchmarks
  178.galgel:   -FI
Peak tuning:
  168.wupwise:  basepeak=1
  171.swim:     pathf95 -Ofast -LNO:fusion=2:simd=0 -WOPT:val=0 -march=em64t
  172.mgrid:    pathf95 -Ofast -CG:load_exe=0 -LNO:blocking=off:prefetch_ahead=5
                -OPT:ro=3:unroll_size=256 -WOPT:mem_opnds=on -march=em64t
  173.applu:    pathf95 -O3 -ipa -CG:load_exe=0
                -LNO:fission=1:fusion=2:blocking=off:full_unroll_size=9000
                -OPT:IEEE_a=3:ro=3 -TENV:X=3 -march=em64t
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    177.mesa:     pathcc -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                  -GRA:optimize_boundary=on -march=em64t +FDO
    178.galgel:   basepeak=1
    179.art:      basepeak=1
    183.equake:   icc -fast +FDO ONESTEP=yes -rcd -auto-ilp32
    187.facerec:  pathf95 -Ofast -IPA:plimit=1500 -LNO:fusion=2
                  -OPT:IEEE_NaN_Inf=off:ro=3:unroll_size=0 -march=em64t +FDO
    188.ammp:     basepeak=1
    189.lucas:    ifort -fast ONESTEP=yes
    191.fma3d:    basepeak=1
    200.sixtrack: basepeak=1
    301.apsi:     pathf95 -Ofast -CG:load_exe=0 -LNO:opt=0:prefetch=1 -march=em64t
  BIOS Configuration Notes
      Power Regulator set to Static High Performance Mode
    Other Configuration Notes
      Single processor kernel used
```