CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5 (3.73GHz, Intel Xeon processor 5080)

SPECfp2000 = 1936

SPECfp_base2000 = 1930

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	45.4	3525	45.4	3527
171.swim	3100	118	2628	118	2627
172.mgrid	1800	113	1592	113	1592
173.applu	2100	118	1781	118	1781
177.mesa	1400	86.9	1612	86.4	1620
178.galgel	2900	77.5	3741	77.5	3741
179.art	2600	57.8	4496	57.8	4496
183.equake	1300	45.4	2865	45.4	2866
187.facerec	1900	118	1612	118	1612
188.ammp	2200	192	1149	185	1190
189.lucas	2000	116	1721	116	1730
191.fma3d	2100	132	1597	132	1597
200.sixtrack	1100	150	733	150	733
301.apsi	2600	199	1307	199	1307

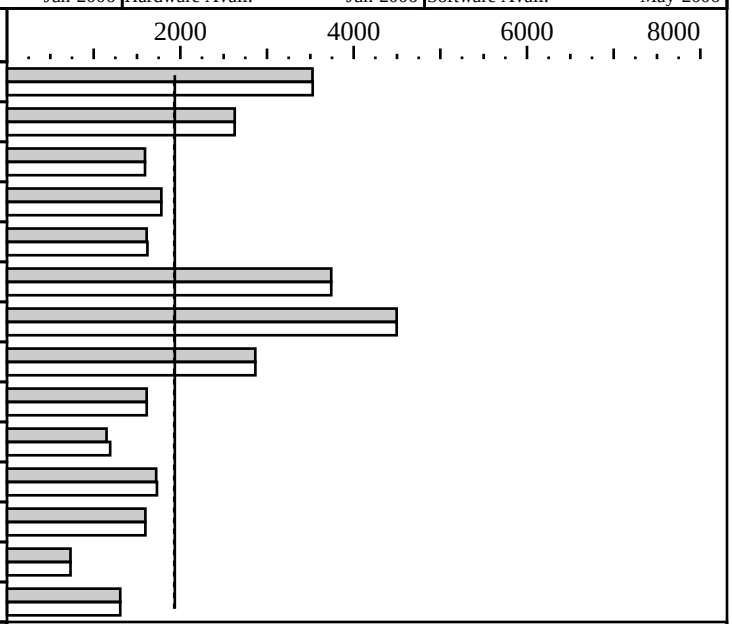

Hardware

CPU:	Intel Xeon processor 5080 (3.73GHz, 2x2MB L2, 1066MHz bus)
CPU MHz:	3730
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024MB PC2-5300F
Disk Subsystem:	1x36GB 10K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Intel Fortran Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs: -fast -Qansi_alias +FDO
Base tuning for C programs:       -fast              +FDO shlw32M.lib
Portability flags:
  178.galgel: -FI /F32000000
Peak tuning:
  168.wupwise:  -fast -Qansi_alias                 +FDO
  171.swim:     -fast                              +FDO ONESTEP=yes
  172.mgrid:    -fast -Qansi_alias                 +FDO
  173.applu:    basepeak=1
  177.mesa:     -fast                              +FDO ONESTEP=yes
  178.galgel:   basepeak=1
  179.art:      basepeak=1
  183.equake:   -fast -Oa -Qrcd                    +FDO ONESTEP=yes shlw32M.lib
  187.facerec:  -fast -Qunroll1 -Qscalar_rep-       +FDO ONESTEP=yes
  188.ammp:     -fast -Qansi_alias                 +FDO
  189.lucas:    -fast
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    191.fma3d:    basepeak=1
    200.sixtrack: -fast                                +FDO
    301.apsi:     basepeak=1
  BIOS Configuration Notes
    Power Regulator set to Static High Performance Mode
    Hyper-Threading Technology disabled
```