CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX630, AMD Opteron (TM) 256

SPECint_rate2000 = 24.6

SPECint_rate_base2000 = 22.5

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jul-2006 | Hardware Avail: Apr-2006 | Software Avail: Jul-2006

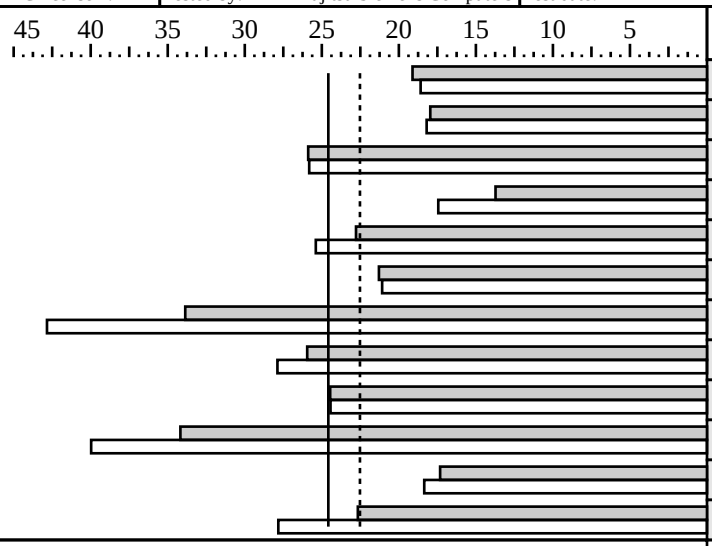

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	85.0	19.1	1	87.4	18.6
175.vpr	1	90.4	18.0	1	89.3	18.2
176.gcc	1	49.3	25.9	1	49.4	25.8
181.mcf	1	152	13.7	1	120	17.4
186.crafty	1	50.9	22.8	1	45.7	25.4
197.parser	1	98.1	21.3	1	99.0	21.1
252.eon	1	44.5	33.9	1	35.2	42.8
253.perlbmk	1	80.5	25.9	1	74.9	27.9
254.gap	1	52.2	24.5	1	52.2	24.4
255.vortex	1	64.5	34.2	1	55.1	40.0
256.bzip2	1	100	17.3	1	94.8	18.4
300.twolf	1	154	22.7	1	125	27.8

Hardware

CPU:	AMD Opteron (TM) 256 processor (3.0 GHz)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x1GB DDR-RAM PC3200R (CAS 3-3-3)
Disk Subsystem:	Maxtor DiamondPLUS 9 (SATA)
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1
Compiler:	Intel C++ 9.1 Build 20060519Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1= -Qprof_gen  PASS2= -Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast -arch:SSE2 -Oi- +FDO
   for C++ programs: -O3 -Qipo -Qcxx-features +FDO

Peak tuning flags
   164.gzip:    -O3 -Qipo -QxW +FDO
   175.vpr:     -O3 -Qipo -QxW -Qoption,c,-ip_ninl_max_stats=2000,
                -ip_ninl_max_total_stats=4500 +FDO
   176.gcc:     -O3 -Qipo -QxW -Oi- -Qunroll3 +FDO shlw32M.lib
   181.mcf:     -O3 -Qipo -QaxN +FDO shlw32M.lib
   186.crafty:  -O3 -Qipo -QxW +FDO shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    197.parser:  -Oi -Qipo -QxW +FDO shlw32M.lib
    252.eon:     -O3 -Qipo -QxW -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000,
                 -ip_ninl_max_total_stats=4500 +FDO shlw32M.lib
    253.perlbmk: -O3 -Qipo -QxW +FDO shlw32M.lib
    254.gap:     -O3 -Qipo -QxW +FDO shlw32M.lib
    255.vortex:  -O3 -Qipo -arch:SSE -Oi- -Qoption,c,-ip_ninl_max_stats=2000,
                 -ip_ninl_max_total_stats=4500 +FDO shlw32M.lib
    256.bzip2:   -O3 -Qipo -Qunroll2 shlw32M.lib
    300.twolf:   -O3 -Qipo -QxW -Qunroll3 -Qansi_alias +FDO shlw32M.lib


Boot options:  /execute /nopae

BIOS settings: Memory timing=1T
DRAM Bank Interleave=AUTO

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```