CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon 5150 processor, 2.66 GHz

SPECfp_rate2000 = 78.2

SPECfp_rate_base2000 = 78.2

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jul-2006 | Hardware Avail: Jul-2006 | Software Avail: Jan-2006

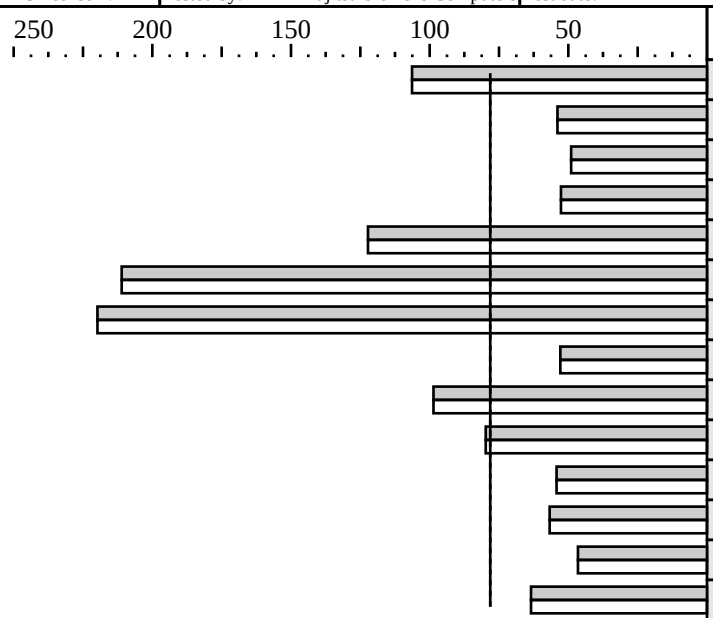

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	69.8	106	4	69.8	106
171.swim	4	267	53.9	4	267	53.9
172.mgrid	4	171	49.0	4	171	49.0
173.applu	4	185	52.7	4	185	52.7
177.mesa	4	53.1	122	4	53.1	122
178.galgel	4	63.8	211	4	63.8	211
179.art	4	54.9	220	4	54.9	220
183.equake	4	114	52.9	4	114	52.9
187.facerec	4	89.4	98.6	4	89.4	98.6
188.ammp	4	128	79.8	4	128	79.8
189.lucas	4	171	54.2	4	171	54.2
191.fma3d	4	172	56.7	4	172	56.7
200.sixtrack	4	110	46.5	4	110	46.5
301.apsi	4	190	63.5	4	190	63.5

Hardware

CPU:	Intel Xeon 5150 processor (2.66 GHz, 4MB SLC, 1333 MHz system bus)
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	4096KB(I+D) on chip, per chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024 MB DDRII-RAM PC2-5300F (CAS 5-5-5)
Disk Subsystem:	Seagate ST336754SS (SAS, 15.4krpm, 36GB)
Other Hardware:	none

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 9 with SP3 Kernel 2.6.5-7.244-smp on an x86_64
Compiler:	Intel C++ and Fortran Compiler 9.0 for EM64T Build 20060120 (for 64-bit applications)
File System:	ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO implies feedback-directed optimization
PASS1: -prof_gen  PASS2: -prof_use

Optimization flags
ONESTEP=yes set for all benchmarks

Portability flags
-DSPEC_CPU2000_LP64 applied to all benchmarks
178.galgel: -FI for fixed-format Fortran

Base tuning flags
   for Fortran and C programs: -fast +FDO

Peak tuning flags
   same as baseline (basepeak=true set globally)
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

The system bus runs at 1333 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries