CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K9HM (S3992), AMD Opteron (TM) 2210

SPECint2000 = 1297

SPECint_base2000 = 1150

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	160	874	141	995
175.vpr	1400	168	835	132	1059
176.gcc	1100	118	934	80.9	1360
181.mcf	1800	184	978	150	1203
186.crafty	1000	82.6	1211	78.6	1273
197.parser	1800	156	1157	156	1155
252.eon	1300	78.4	1658	70.2	1852
253.perlbmk	1800	134	1346	131	1378
254.gap	1100	88.4	1245	88.4	1245
255.vortex	1900	108	1755	102	1870
256.bzip2	1500	147	1023	143	1052
300.twolf	3000	262	1144	210	1429

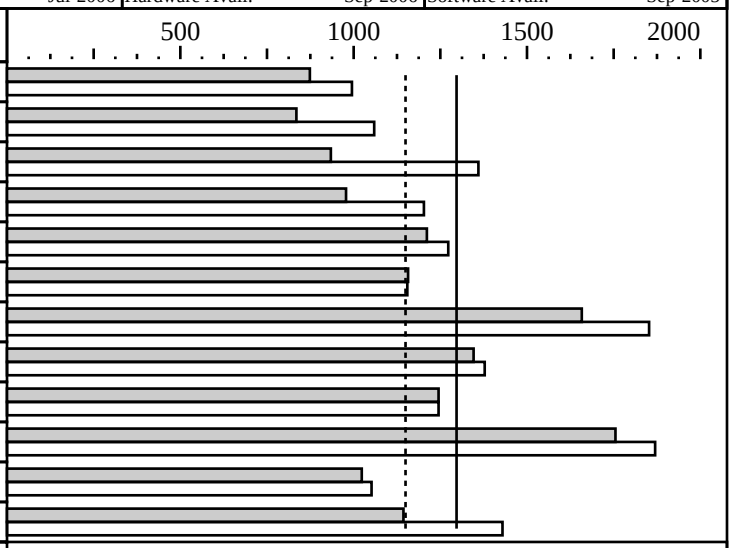

Hardware

CPU:	AMD Opteron (TM) 2210
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	no
Primary Cache:	64KBI + 64KBD on chip per core
Secondary Cache:	1024KB (I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512MB, DDR2-667 CL4 ECC Reg
Disk Subsystem:	IDE, 120 GB
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition SP1 (32-bit)
Compiler:	Intel C++ 9.0 build 20050912Z for IA32 Microsoft Visual Studio .NET 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V7.0 from MicroQuill (www.microquill.com)
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
  176.gcc:      -Dalloca=_alloca /F10000000
  186.crafty:   -DNT_i386
  253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -O3 -Qipo -Op +FDO
Baseline C++: -O3 -Qipo -Qcxx-features +FDO
Peak Tuning:
164.gzip:     -O3 -Qipo -QxW +FDO
175.vpr:      -O3 -Qipo -QxW +FDO
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
176.gcc:      -O3 -Qipo -QxW -Oi- -Qunroll3 +FDO
181.mcf:      -O3 -Qipo -QaxN      +FDO
186.crafty:   -O3 -Qipo -QxW +FDO
197.parser:   -QxW +FDO -Oi- -Qipo
252.eon:      -O3 -Qipo -QxW +FDO -Qansi_alias
             -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
253.perlbmk:  -O3 -Qipo -QxW +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 254.gap:       basepeak = yes
 255.vortex:   -O3 -Qipo -arch:SSE  +FDO -Oi- shlW32M.lib
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 256.bzip2:    -O3 -Qipo              -Qunroll2
 300.twolf:    -O3 -Qipo -QxW +FDO    -Qunroll3 shlW32M.lib -Qansi_alias
system can be built using a standard ATX case and a Zippy 700W PSL-6701P power supply
Half memory slots populated on CPU in dual channel configuration
```