CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K9HM (S3992), AMD Opteron (TM) 2218

SPECfp_rate2000 = 27.3

SPECfp_rate_base2000 = 24.6

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Jan-2006

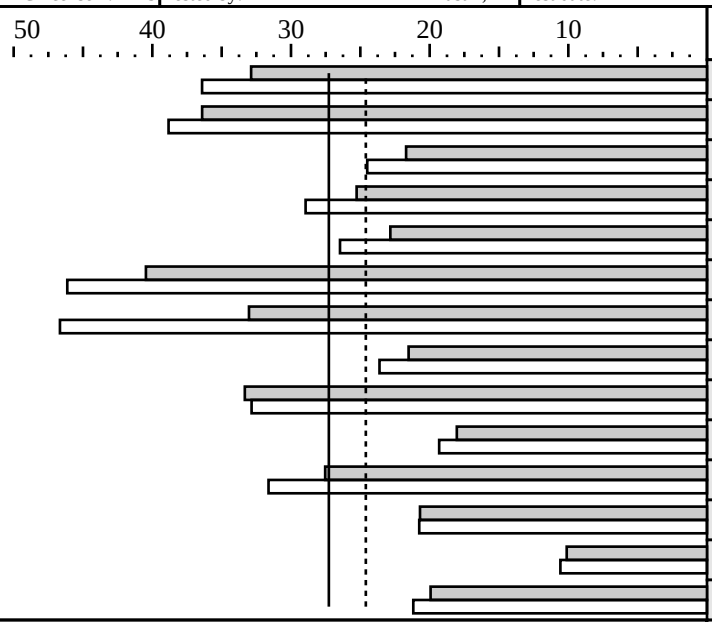

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	56.5	32.9	1	51.0	36.4
171.swim	1	98.8	36.4	1	92.6	38.8
172.mgrid	1	96.2	21.7	1	85.2	24.5
173.applu	1	96.4	25.3	1	84.2	28.9
177.mesa	1	71.1	22.8	1	61.4	26.5
178.galgel	1	83.1	40.5	1	72.9	46.1
179.art	1	91.3	33.0	1	64.6	46.7
183.equake	1	70.1	21.5	1	63.9	23.6
187.facerec	1	66.1	33.3	1	67.1	32.8
188.ammp	1	141	18.0	1	132	19.3
189.lucas	1	84.3	27.5	1	73.4	31.6
191.fma3d	1	118	20.7	1	117	20.8
200.sixtrack	1	126	10.1	1	121	10.6
301.apsi	1	151	19.9	1	142	21.2

Hardware

CPU:	AMD Opteron (TM) 2218
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip per core
Secondary Cache:	1024KB (I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512MB, DDR2-667 CL4 ECC Reg
Disk Subsystem:	IDE, 120 GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 SP3 (64-bit)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3
File System:	Linux/ext3
System State:	Multi-user, run level 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
  +ACML  means -L<acml2.7.0-install-dir>/pathscale64/lib -lacml,
         which causes linking with AMD Core Math Library V2.7.0

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000
                -INLINE:aggressive=on
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
              -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
              -WOPT:mem_opnds=on:aggstr=0
173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
              -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3 +FDO
177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +ACML +FDO
               RM_SOURCES=lapak.f90
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -LNO:fusion=2
              -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2

system can be built using a standard ATX case and a Zippy 700W PSL-6701P power supply
Half memory slots populated on CPU in dual channel configuration
```