CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K9HM (S3992), AMD Opteron (TM) 2218

SPECint2000 = 1827

SPECint_base2000 = 1647

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Jan-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	89.0	1574	88.5	1582
175.vpr	1400	109	1290	106	1324
176.gcc	1100	61.6	1787	62.2	1769
181.mcf	1800	222	811	139	1293
186.crafty	1000	43.6	2291	42.5	2354
197.parser	1800	146	1237	118	1526
252.eon	1300	48.7	2668	42.1	3085
253.perlbmk	1800	103	1744	93.5	1925
254.gap	1100	61.8	1781	61.8	1781
255.vortex	1900	72.8	2610	67.3	2821
256.bzip2	1500	100	1498	100	1498
300.twolf	3000	203	1477	166	1802

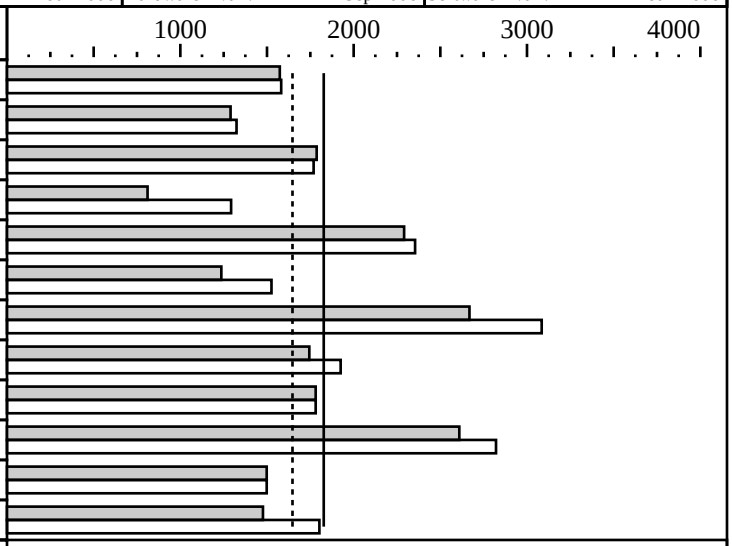

Hardware

CPU:	AMD Opteron (TM) 2218
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip per core
Secondary Cache:	1024KB (I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512MB, DDR2-667 CL4 ECC Reg
Disk Subsystem:	IDE, 120 GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 SP3 (64-bit)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3
File System:	Linux/ext3
System State:	Multi-user, run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

Baseline optimization flags:
  C programs:       -Ofast +FDO
  C++ programs:     -Ofast +FDO

Portability Flags:
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64

Peak Tuning:
164.gzip:    -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
175.vpr:     -O3 -ipa -m32 +FDO
176.gcc:     -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
186.crafty:  -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
             -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exceptions
             -LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
             -fno-math-errno -IPA:plimit=10000 +FDO
255.vortex:  -Ofast -OPT:goto=off -CG:p2align=on
             -GRA:optimize_boundary=on -IPA:min_hotness=120 +FDO
256.bzip2:   basepeak = true
300.twolf:   -O2 -CG:gcm=off:p2align_freq=100000
             -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
             -WOPT:mem_opnds=on -m32 +FDO

system can be built using a standard ATX case and a Zippy 700W PSL-6701P power supply
Half memory slots populated on CPU in dual channel configuration
```