CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K9HM (S3992), AMD Opteron (TM) 2210

SPECfp2000 = 1746

SPECfp_base2000 = 1578

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Jan-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	76.8	2085	67.3	2378
171.swim	3100	126	2456	120	2585
172.mgrid	1800	133	1356	115	1561
173.applu	2100	129	1623	115	1821
177.mesa	1400	102	1375	87.4	1601
178.galgel	2900	113	2566	98.5	2943
179.art	2600	116	2250	85.3	3046
183.equake	1300	87.6	1484	80.8	1608
187.facerec	1900	87.9	2163	89.3	2127
188.ammp	2200	197	1116	183	1200
189.lucas	2000	106	1889	92.6	2159
191.fma3d	2100	160	1308	160	1313
200.sixtrack	1100	181	606	174	634
301.apsi	2600	210	1240	197	1319

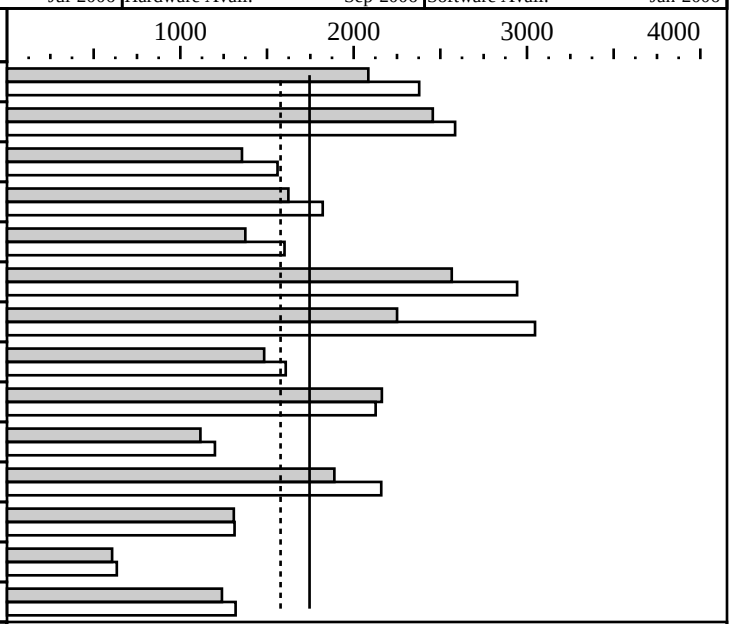

Hardware

CPU:	AMD Opteron (TM) 2210
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip per core
Secondary Cache:	1024KB (I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512MB, DDR2-667 CL4 ECC Reg
Disk Subsystem:	IDE, 120 GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 SP3 (64-bit)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3
File System:	Linux/ext3
System State:	Multi-user, run level 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
  +ACML  means -L<acml2.7.0-install-dir>/pathscale64/lib -lacml,
         which causes linking with AMD Core Math Library V2.7.0

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000
                -INLINE:aggressive=on
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
              -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
              -WOPT:mem_opnds=on:aggstr=0
173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
              -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3 +FDO
177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +ACML +FDO
               RM_SOURCES=lapak.f90
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -LNO:fusion=2
              -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2

system can be built using a standard ATX case and a Zippy 700W PSL-6701P power supply
Half memory slots populated on CPU in dual channel configuration
```