CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K9HM (S3992), AMD Opteron (TM) 2210

SPECint2000 = 1326

SPECint_base2000 = 1202

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Jan-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	128	1095	127	1099
175.vpr	1400	143	978	142	987
176.gcc	1100	86.6	1271	87.7	1255
181.mcf	1800	260	693	169	1063
186.crafty	1000	62.9	1590	61.4	1628
197.parser	1800	200	900	165	1088
252.eon	1300	70.4	1846	60.5	2149
253.perlbmk	1800	147	1225	128	1404
254.gap	1100	86.2	1276	86.2	1276
255.vortex	1900	99.4	1911	92.8	2047
256.bzip2	1500	136	1100	136	1100
300.twolf	3000	270	1110	226	1325

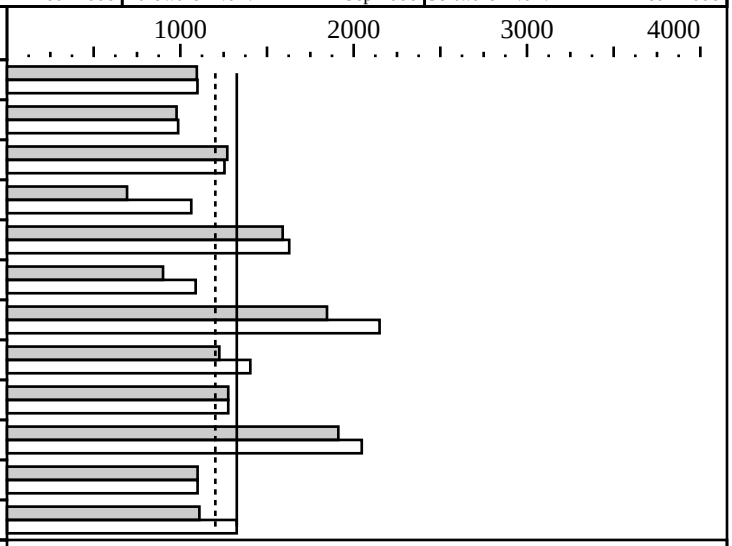

Hardware

CPU:	AMD Opteron (TM) 2210
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip per core
Secondary Cache:	1024KB (I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512MB, DDR2-667 CL4 ECC Reg
Disk Subsystem:	IDE, 120 GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 SP3 (64-bit)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3
File System:	Linux/ext3
System State:	Multi-user, run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

Baseline optimization flags:
  C programs:       -Ofast +FDO
  C++ programs:     -Ofast +FDO

Portability Flags:
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64

Peak Tuning:
164.gzip:    -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
175.vpr:     -O3 -ipa -m32 +FDO
176.gcc:     -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
186.crafty:  -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
             -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exceptions
             -LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
             -fno-math-errno -IPA:plimit=10000 +FDO
255.vortex:  -Ofast -OPT:goto=off -CG:p2align=on
             -GRA:optimize_boundary=on -IPA:min_hotness=120 +FDO
256.bzip2:   basepeak = true
300.twolf:   -O2 -CG:gcm=off:p2align_freq=100000
             -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
             -WOPT:mem_opnds=on -m32 +FDO

system can be built using a standard ATX case and a Zippy 700W PSL-6701P power supply
Half memory slots populated on CPU in dual channel configuration
```