CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

IBM System p5 520Q (1650 MHz, 1 CPU)

SPECint2000 = 1371

SPECint_base2000 = 1311

SPEC license #: 11 | Tested by: IBM Austin | Test date: Jun-2006 | Hardware Avail: Aug-2006 | Software Avail: Aug-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	187	747	181	774
175.vpr	1400	118	1185	118	1185
176.gcc	1100	72.7	1513	72.7	1513
181.mcf	1800	62.9	2864	61.6	2923
186.crafty	1000	95.3	1049	78.9	1267
197.parser	1800	156	1152	154	1170
252.eon	1300	91.6	1419	90.1	1443
253.perlbmk	1800	204	881	183	982
254.gap	1100	94.5	1163	94.2	1167
255.vortex	1900	89.0	2135	84.6	2246
256.bzip2	1500	121	1236	115	1307
300.twolf	3000	206	1454	198	1515

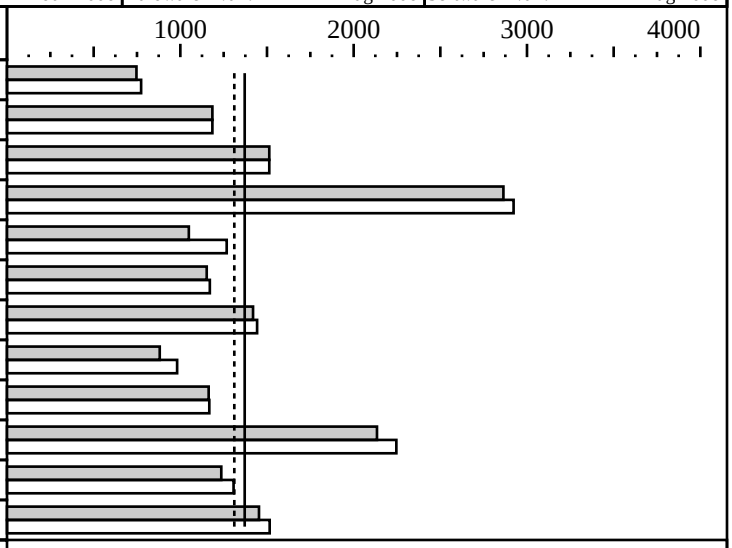

Hardware

CPU:	POWER5+
CPU MHz:	1650
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (SMT off)
CPU(s) orderable:	4 cores
Parallel:	No
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	1920 KB I+D on chip per chip
L3 Cache:	36 MB I+D off chip per chip
Other Cache:	None
Memory:	16 GB (8x2 GB)
Disk Subsystem:	1x73GB SCSI, 15K RPM
Other Hardware:	None

Software

Operating System:	AIX 5L V5.3
Compiler:	XL C/C++ Enterprise Edition Version 8.0 for AIX XL Fortran Enterprise Edition Version 10.1 for AIX Other Software: ESSL 4.2.0.4
File System:	AIX/JFS2
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  176.gcc:      -ma -DHOST_WORDS_BIG_ENDIAN
  186.crafty:   -DAIX
  253.perlbmk:  -DSPEC_CPU2000_AIX
  254.gap:      -DSYS_IS_BSD -DSYS_STRING_H
                -DSYS_HAS_MALLOC_PROTO -DSYS_HAS_CALLOC_PROTO
  300.twolf:    -DHAVE_SIGNED_CHAR

Base Optimization Flags:
  C:    -qpdf1/pdf2
        -O5 -blpdata -D_ILS_MACROS
  C++:  -qpdf1/pdf2
        -O4 -qalign=natural

Peak Optimization Flags
  164.gzip:     -qpdf1/pdf2
                -O4 -qfdpr -blpdata
                fdpr -q -O3
  175.vpr:      basepeak=1
  176.gcc:      basepeak=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  181.mcf:      -qpdf1/pdf2
                -O5 -blpdata -qalign=natural -qhot=arraypad -qfdpr -Q -qmaxmem=-1
                fdpr -q -O3
  186.crafty:   -qpdf1/pdf2
                -O4 -qalign=natural -q64 -lhmu -blpdata
  197.parser:   -qpdf1/pdf2
                -O4 -qfdpr -D_ILS_MACROS -blpdata
                fdpr -q -O3
  252.eon:      -qpdf1/pdf2
                -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural
  253.perlbmk:  -qpdf1/pdf2
                -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural -blpdata -lhmu
  254.gap:      -qpdf1/pdf2
                -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural -blpdata
  255.vortex:   -qpdf1/pdf2
                -O4 -qfdpr -lhmu -blpdata
                fdpr -q -O3
  256.bzip2:    -qpdf1/pdf2
                -O5 -qfdpr -blpdata
                fdpr -q -O3
  300.twolf:    -O5 -qfdpr -blpdata
                fdpr -q -O3


The installed OS level is AIX 5L for POWER Version 5.3 with the 5300-05 Recommended Technology Level.
The installed C/C++ compiler is XL C/C++ Enterprise Edition Version 8.0 for AIX with the March 2006 PTF.
The installed Fortran copiler is XL Fortran Enterprise Edition Version 10.1 with the May 2006 AIX PTF.

SMT:  Acronym for "Simultaneous Multi-Threading". A processor technology that allows
      the simultaneous execution of multiple thread contexts within a single processor
      core. (Enabled by default)
SUT:  Acronym for "System Under Test"
PTF:  IBM identifier for "Program Fix Level"

Extended C:     IBM XL C for AIX invoked as cc
ANSI C89:       IBM XL C for AIX invoked as xlc
C++:            IBM XL C for AIX invoked as xlC

ulimits set to unlimited.
Large page mode and memory affinity were set as follows:
    vmo -r -o lgpg_regions=128 -o lgpg_size=16777216
    chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
    bosboot -aD
    shutdown -rF
    export MEMORY_AFFINITY=MCM

The following config-file entry was used to assign each benchmark process to a core:
     submit = bindprocessor $$ $SPECUSERNUM; $command
The "bindprocessor" AIX command binds a process to a CPU core.
Three cores were deconfigured and SMT disabled using the AIX commands
     smtctl -m off -w boot
     bosboot -aD
     shutdown -rF
     drmgr -r -c cpu
     drmgr -r -c cpu
     drmgr -r -c cpu
```

CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

IBM System p5 520Q (1650 MHz, 1 CPU)

SPECint2000 = 1371

SPECint_base2000 = 1311

SPEC license #: 11 | Tested by: IBM Austin | Test date: Jun-2006 | Hardware Avail: Aug-2006 | Software Avail: Aug-2006

Notes/Tuning Information (Continued)

This result was measured on an IBM System p5 505Q. IBM System p5 505Q (2-core version) and IBM System p5 520Q are electronically equivalent.