CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

ASUS M2N-LR/SATA, AMD ‘Opteron (TM) 1220SE

SPECfp_rate2000 = 45.9

SPECfp_rate_base2000 = 41.8

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Jan-2006

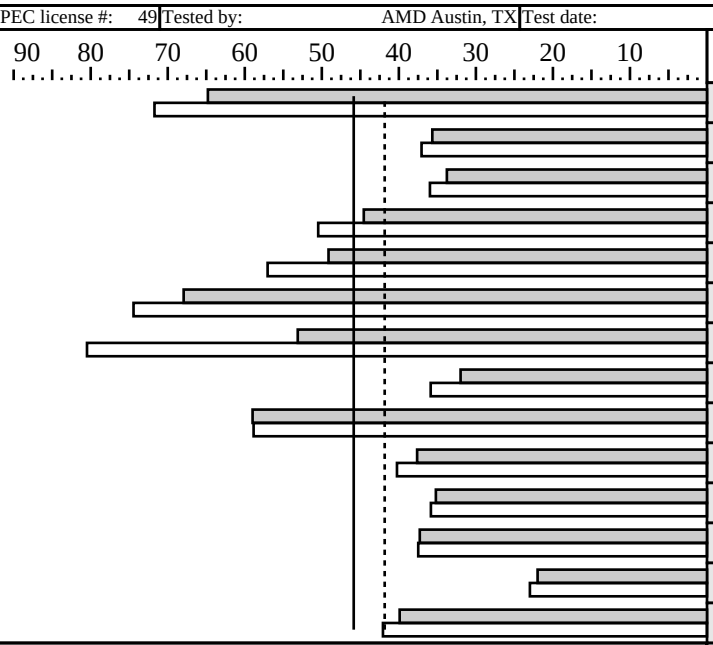

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	57.3	64.8	2	51.8	71.7
171.swim	2	202	35.7	2	194	37.1
172.mgrid	2	124	33.8	2	116	36.0
173.applu	2	109	44.6	2	96.5	50.5
177.mesa	2	66.1	49.1	2	56.9	57.0
178.galgel	2	99.0	67.9	2	90.4	74.4
179.art	2	114	53.1	2	74.9	80.5
183.equake	2	94.3	32.0	2	84.1	35.9
187.facerec	2	74.7	59.0	2	74.9	58.9
188.ammp	2	136	37.6	2	127	40.2
189.lucas	2	132	35.2	2	129	35.8
191.fma3d	2	131	37.3	2	130	37.5
200.sixtrack	2	116	22.0	2	111	23.0
301.apsi	2	151	39.9	2	143	42.1

Hardware

CPU:	AMD Opteron (TM) 1220SE
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip per core
Secondary Cache:	1024KB (I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x1024MB, DDR2-800 CL3
Disk Subsystem:	IDE, 120GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 SP3 (64-bit)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3
File System:	Linux/ext3
System State:	Multi-user, run level 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
  +ACML  means -L<acml2.7.0-install-dir>/pathscale64/lib -lacml,
         which causes linking with AMD Core Math Library V2.7.0

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000
                -INLINE:aggressive=on
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
              -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
              -WOPT:mem_opnds=on:aggstr=0
173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
              -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3 +FDO
177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +ACML +FDO
               RM_SOURCES=lapak.f90
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -LNO:fusion=2
              -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2

The tested system can be assembled using a standard ATX case and an Antec True 550
watt EPS12V Power Supply.
Half memory slots populated in dual channel configuration.
taskset utility used to bind CPU(s) to processes.
```