CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5 (1.86 GHz, Intel Xeon processor 5120)

SPECfp2000 = 2120

SPECfp_base2000 = 1945

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	52.4	3054	52.4	3054
171.swim	3100	135	2295	131	2373
172.mgrid	1800	137	1310	104	1724
173.applu	2100	129	1623	101	2087
177.mesa	1400	71.3	1962	65.6	2134
178.galgel	2900	65.4	4435	65.4	4435
179.art	2600	35.0	7421	35.0	7421
183.equake	1300	71.3	1824	57.6	2258
187.facerec	1900	91.9	2067	68.1	2792
188.ammp	2200	158	1394	158	1394
189.lucas	2000	121	1652	120	1666
191.fma3d	2100	139	1510	139	1510
200.sixtrack	1100	154	713	154	713
301.apsi	2600	211	1232	202	1286

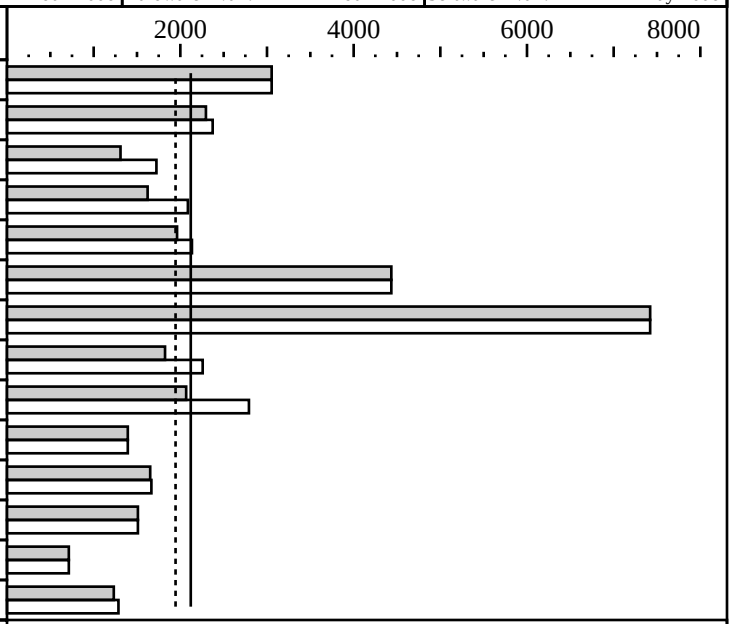

Hardware

CPU:	Intel Xeon processor 5120 (1.86 GHz, 4 MB L2 shared, 1066 MHz bus)
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16 GB (8x2048 MB PC2-5300F)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	RedHat Enterprise Linux 4.0 Advanced Server for AMD64/EM64T, Update 3 Kernel 2.6.9-34.ELsmp
Compiler:	Intel C++ Compiler for EM64T-based applications, (Version 9.1 Build 20060323) Intel Fortran Compiler for EM64T-based applications, (Version 9.1 Build 20060323) PathScale EKOPath(TM) Compiler Suite, Release 2.4
File System:	ext2
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1= -prof_gen  PASS2=-prof_use (Intel Compiler)
+FDO: PASS1= -fb_create fbdata PASS2=-fb_opt fbdata (PathScale Compiler)
ifort is the Intel Fortran compiler, icc is the Intel C++ compiler; and
pathf95 is PathScale Fortran compiler, pathcc is the PathScale C compiler.
Base tuning for C programs:  icc -fast -auto_ilp32 +FDO
Base tuning for FORTRAN programs:  ifort -fast +FDO
Portability:
  -DSPEC_CPU2000_LP64 applied to all benchmarks
  178.galgel:   -FI
Peak tuning:
  168.wupwise:  basepeak=1
  171.swim:     pathf95 -Ofast -LNO:fusion=2:simd=0 -WOPT:val=0 -march=em64t
  172.mgrid:    pathf95 -Ofast -CG:load_exe=0 -LNO:blocking=off:prefetch_ahead=5
                -OPT:ro=3:unroll_size=256 -WOPT:mem_opnds=on -march=em64t
  173.applu:    pathf95 -O3 -ipa -CG:load_exe=0
                -LNO:fission=1:fusion=2:blocking=off:full_unroll_size=9000
                -OPT:IEEE_a=3:ro=3 -TENV:X=3 -march=em64t
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    177.mesa:     pathcc -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                  -GRA:optimize_boundary=on -march=em64t +FDO
    178.galgel:   basepeak=1
    179.art:      basepeak=1
    183.equake:   icc -fast +FDO ONESTEP=yes -rcd -auto-ilp32
    187.facerec:  pathf95 -Ofast -IPA:plimit=1500 -LNO:fusion=2
                  -OPT:IEEE_NaN_Inf=off:ro=3:unroll_size=0 -march=em64t +FDO
    188.ammp:     basepeak=1
    189.lucas:    ifort -fast ONESTEP=yes
    191.fma3d:    basepeak=1
    200.sixtrack: basepeak=1
    301.apsi:     pathf95 -Ofast -CG:load_exe=0 -LNO:opt=0:prefetch=1 -march=em64t
  BIOS Configuration Notes
    Power Regulator set to Static High Performance Mode
```