CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) DG965WH motherboard(3.73 GHz, Intel(R) Pentium(R) 4 processor Extreme Edition supporting Hyper-Threading Technology)

SPECfp_rate2000 = 28.7

SPECfp_rate_base2000 = 28.6

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

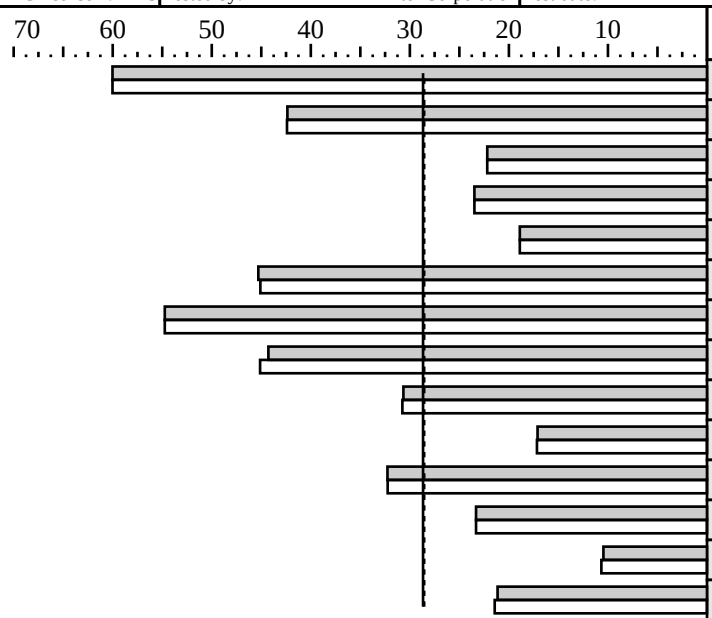

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	61.8	60.0	2	61.8	60.0
171.swim	2	170	42.4	2	170	42.4
172.mgrid	2	188	22.2	2	188	22.2
173.applu	2	207	23.5	2	207	23.5
177.mesa	2	172	18.9	2	172	18.9
178.galgel	2	149	45.3	2	149	45.1
179.art	2	110	54.7	2	110	54.7
183.equake	2	68.1	44.3	2	66.8	45.1
187.facerec	2	144	30.7	2	143	30.8
188.ammp	2	298	17.1	2	297	17.2
189.lucas	2	144	32.3	2	144	32.2
191.fma3d	2	209	23.3	2	209	23.3
200.sixtrack	2	244	10.5	2	239	10.7
301.apsi	2	285	21.1	2	281	21.4

Hardware

CPU:	Intel(R) Pentium(R) 4 processor Extreme Edition supporting Hyper-Threading Technology (3.73 GHz, 1066 MHz bus)
CPU MHz:	3733
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-opsI + 16KBD per core, on chip
Secondary Cache:	2MB(I+D) per core, on chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Corsair TWIN2X2048-8500C5 DDR2 1066 CL5-5-5 DIMMs)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	ATI Radeon X1900 XTX PCI express graphics card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ and Fortran Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_FC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for C programs:  -fast    +FDO shlW32M-80.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M-80.lib
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M-80.lib
189.lucas:    -fast -Qprefetch- +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 07/2006
http://www.intel.com/products/motherboard/dg965wh/index.htm
The system bus runs at 1066 MHz
```