CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Intel Corporation

Intel D945GPM motherboard(3.0 GHz, Intel (R) Pentium (TM) D processor 930)

SPECfp2000 = 1754

SPECfp_base2000 = 1750

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2006 | Hardware Avail: Jun-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	47.8	3344	48.3	3315
171.swim	3100	133	2338	132	2344
172.mgrid	1800	135	1329	137	1318
173.applu	2100	134	1564	134	1564
177.mesa	1400	109	1279	109	1279
178.galgel	2900	91.9	3156	92.6	3131
179.art	2600	60.9	4272	60.9	4272
183.equake	1300	50.6	2568	48.7	2671
187.facerec	1900	107	1775	108	1761
188.ammp	2200	204	1079	202	1087
189.lucas	2000	105	1912	104	1914
191.fma3d	2100	150	1403	150	1403
200.sixtrack	1100	187	587	186	591
301.apsi	2600	223	1167	223	1168

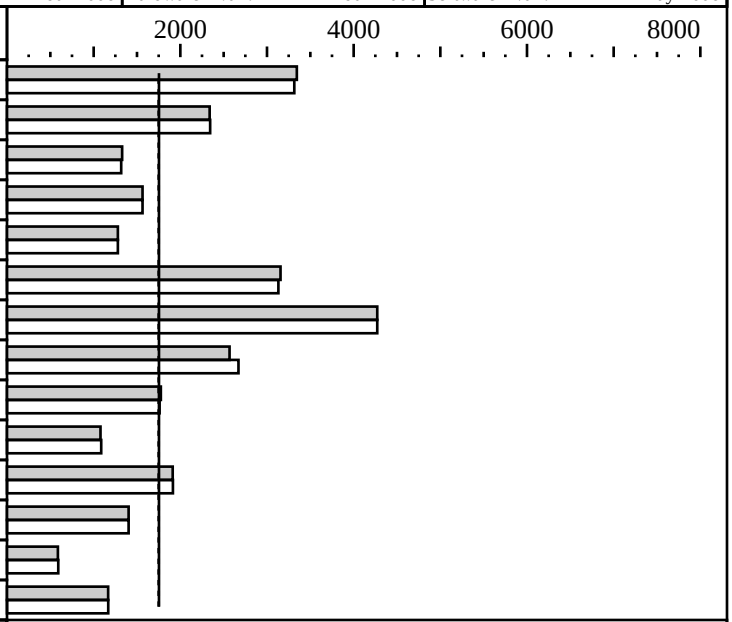

Hardware

CPU:	Intel (R) Pentium (TM) D processor 930(3.0 GHz, 800 MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip per core
Secondary Cache:	2MB(I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2 GB (2 1GB Micron DDR2 667 CL5-5-5 DIMMs)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	ATI Radeon X850 XT PCI express graphics card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ and Fortran Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_FC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for C programs:  -fast    +FDO shlW32M-80.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M-80.lib
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M-80.lib
189.lucas:    -fast -Qprefetch- +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 07/2006:
http://www.intel.com/products/motherboard/d945gpm/index.htm
The system bus runs at 800 MHz
```