CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E6900 (16 processor)

SPECint_rate2000 = 390

SPECint_rate_base2000 = 354

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Jun-2006 | Hardware Avail: Aug-2006 | Software Avail: Jun-2006

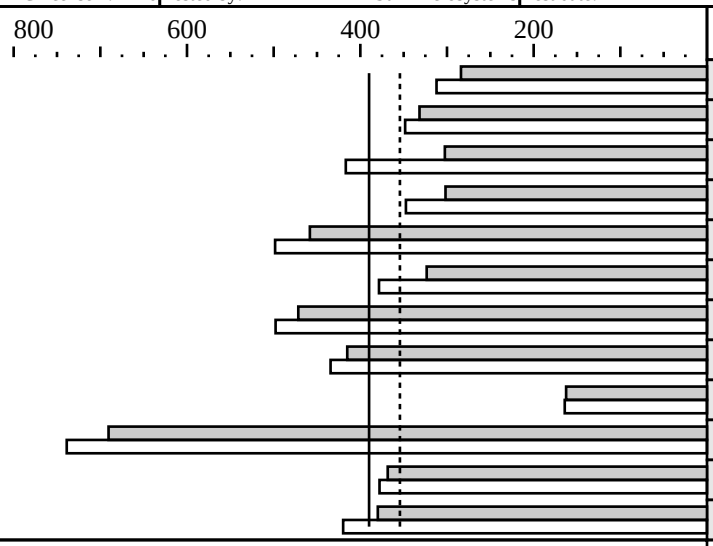

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	32	183	284	32	167	312
175.vpr	32	157	332	32	149	348
176.gcc	32	135	302	32	98.0	417
181.mcf	32	221	302	32	192	347
186.crafty	32	81.0	458	32	74.5	498
197.parser	32	207	323	32	177	378
252.eon	32	102	472	32	96.9	498
253.perlbmk	32	161	415	32	154	434
254.gap	32	251	163	32	249	164
255.vortex	32	102	691	32	95.5	739
256.bzip2	32	151	368	32	147	378
300.twolf	32	293	380	32	265	420

Hardware

CPU:	UltraSPARC IV+
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	32 cores, 16 chips, 2 cores/chip
CPU(s) orderable:	4, 8, 12, 16, 20, 24 (order by number of chips)
Parallel:	No
Primary Cache:	64KBI+64KBD per core on chip
Secondary Cache:	2MB(I+D) per chip (on chip)
L3 Cache:	32MB(I+D) per chip (off chip)
Other Cache:	None
Memory:	64GB 16-way interleaved (128x512MB)
Disk Subsystem:	Sun StorageTek D240 Media Tray (2x73GB, 10000 RPM) Sun StorageTek 6130 Array (14x73GB, 10000 RPM)
Other Hardware:	None

Software

Operating System:	Solaris 10 6/06
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
    C: cc
  CXX: CC

Integer base flags:
  -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
  ONESTEP=yes for all benchmarks
  Profile feedback used for those marked with +FDO

  164.gzip:   -x04 -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=30,
              -Qeps:do_spec_load=1 +FDO
  175.vpr:    -fast -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,
              -Qeps:rp_filtering_margin=30 -xipo=2 -xpagesize_stack=8K
              -lmopt -lm +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  176.gcc:    -fast -xipo=2 -Wc,-Qicache-chbab=1 -Wc,-Qeps:enabled=1
              -Qeps:ws=32 -Wc,-Qdepgraph-early_cross_call=1
              -Wc,-Qms_pipe-pref_prolog -ll2amm +FDO
  181.mcf:    -fast -xipo=2 -xprefetch_level=2
  186.crafty: -fast -xpagesize=8k -xipo=2 -xalias_level=strong
              -W2,-Ashort_ldst -xinline= -xprefetch -xrestrict
              +FDO (-xlinkopt during pass2)
  197.parser: -fast -xipo=2 -xalias_level=strong -Wc,Qgsched-T6
              -Wc,-Qipa:valueprediction -Wc,-Qms_pipe-prefstrong=0,
              -Qlp-pt=weak +FDO
  252.eon:    -fast -xipo=2 -xalias_level=compatible -Qoption cg
              -Qeps:enabled=1 -xvector -Qoption iropt -Abcopy -xunroll=16
              +FDO
  253.perlbmk:-fast -xipo -Wc,-Qeps:enabled=1,-Qeps:ws=16 -xalias_level=std
              -xsafe=mem -Wc,-Qiselect-funcalign=128,-Qicache-chbab=1
              -Wc,-Qiselect-sw_pf_tbl_th=40,-Qeps:do_spec_load=1 +FDO
  254.gap:    -fast -W2,-Abcopy -xvector -xprefetch_level=3 +FDO
  255.vortex: -fast -xrestrict -xipo=2 -Wc,-Qeps:enabled=1
              -W2,-Ainline:recursion=1:cs=400:irs=5000
              -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=64
              -Wc,-Qpeep-Sh0 -W2,-crit -xprefetch=latx:1.7 -fsimple=1
              -Wc,-Qiselect-sw_pf_tbl_th=30 -Wc,-Qicache-chbab=1
              -W2,-Ainline:inc=300 -ll2amm +FDO
  256.bzip2:  -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1 +FDO
  300.twolf:  -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp -xinline= +FDO

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:    rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  176.gcc:    -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
  186.crafty: -DSUN
  253.perlbmk:-DSPEC_CPU2000_SOLARIS
  254.gap:    -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

The system was configured with multiple file systems.
The O/S was installed on one disk of the Sun StorageTek D240
Media Tray (ufs, ufs w/logging).  The benchmark was run on
the Sun StorageTek 6130 Array, using H/W Raid 5 and ufs with
ufs logging file system.
```