CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS M450 (Intel Core 2 Duo processor E6300)

SPECfp2000 = 1963

SPECfp_base2000 = 1960

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	48.0	3333	47.9	3341
171.swim	3100	122	2542	123	2523
172.mgrid	1800	145	1245	144	1246
173.applu	2100	122	1722	122	1722
177.mesa	1400	79.4	1763	79.0	1771
178.galgel	2900	72.7	3989	72.4	4003
179.art	2600	50.0	5200	50.1	5189
183.equake	1300	48.3	2692	48.3	2692
187.facerec	1900	99.8	1903	99.8	1904
188.ammp	2200	190	1156	186	1181
189.lucas	2000	97.3	2056	97.3	2056
191.fma3d	2100	135	1551	136	1549
200.sixtrack	1100	148	742	148	742
301.apsi	2600	196	1324	196	1326

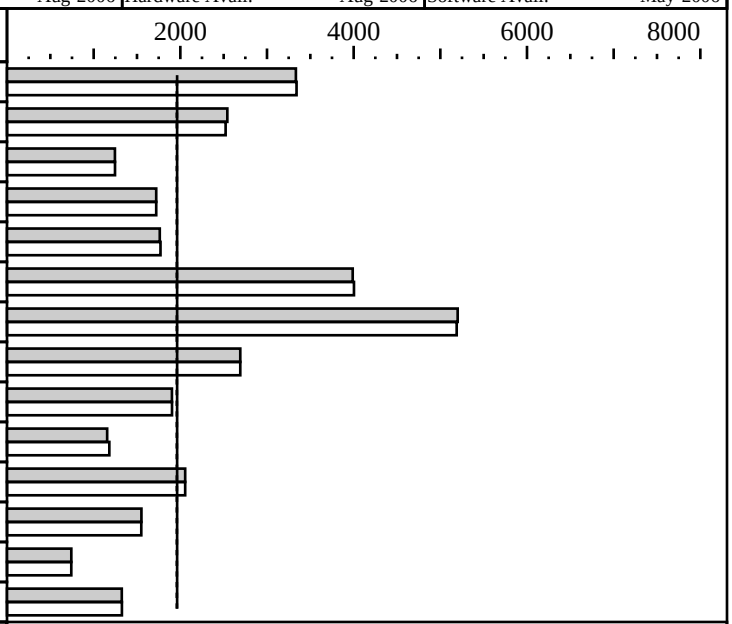

Hardware

CPU:	Intel Core 2 Duo processor E6300
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x 1GB PC2-5300 5-5-5 2Rank SDRAM
Disk Subsystem:	1 x 160GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows XP Professional, Service Pack 2
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.1, - Build 20060519Z Package ID: W_CC_P_9.1.025 Intel(R) Fortran Compiler for 32-bit app., Version 9.1, - Build 20060519Z Package ID: W_FC_P_9.1.025 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library, Version 8 (shlW32M.lib)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
Portability flags:
 178.galgel:  -FI /F32000000

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO shlW32M.lib
 for Fortran programs:
 -fast +FDO shlW32M.lib

Peak Tuning Flags:
 173.applu:      basepeak=yes
 168.wupwise:  -fast +FDO
 171.swim:     -fast +FDO
 172.mgrid:    -fast +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 173.applu:    basepeak=yes
 177.mesa:     -fast +FDO ONESTEP=yes
 178.galgel:   -fast +FDO
 179.art:      -fast +FDO shlW32M.lib
 183.equake:   -fast +FDO shlW32M.lib
 187.facerec:  -fast +FDO
 188.ammp:     -fast +FDO
 189.lucas:    basepeak=yes
 191.fma3d:    -fast +FDO
 200.sixtrack: -fast +FDO
 301.apsi:     -fast +FDO

Extra Libraries:
 shlW32M.lib = Microquill SmartHeap Library 8
 see www.microquill.com

The system bus runs at 1066 MHz

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```