CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G2 (AMD Opteron (TM) 2218)

SPECfp2000 = 1945

SPECfp_base2000 = 1766

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2006 | Hardware Avail: Sep-2006 | Software Avail: Apr-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	58.5	2734	58.5	2734
171.swim	3100	124	2504	122	2549
172.mgrid	1800	111	1628	111	1628
173.applu	2100	141	1485	124	1692
177.mesa	1400	138	1015	68.8	2035
178.galgel	2900	99.3	2921	90.9	3190
179.art	2600	58.6	4439	58.6	4436
183.equake	1300	78.6	1654	78.6	1654
187.facerec	1900	95.8	1984	101	1880
188.ammp	2200	189	1162	158	1395
189.lucas	2000	109	1843	91.1	2195
191.fma3d	2100	133	1584	118	1778
200.sixtrack	1100	140	787	140	787
301.apsi	2600	173	1505	173	1505

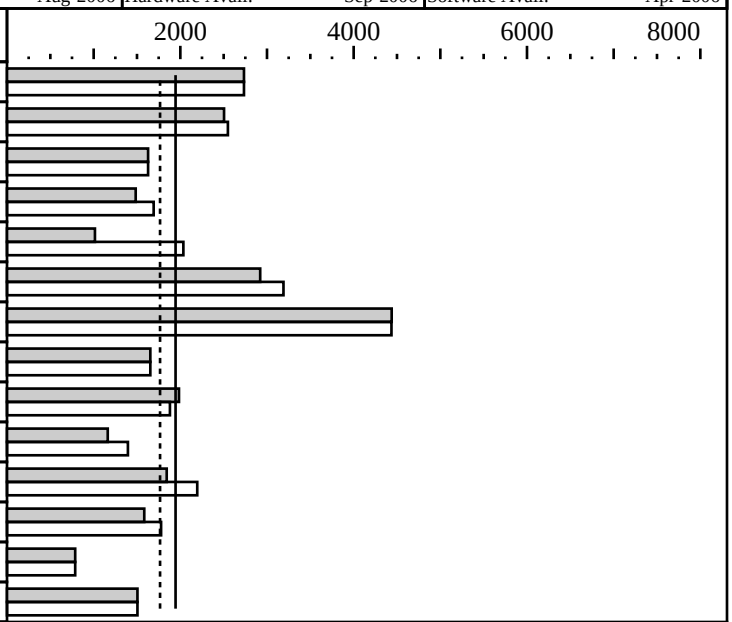

Hardware

CPU:	AMD Opteron (TM) 2218
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (4x2048 MB PC2-5300P CL5.0)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 9.1 Build 20060323Z) Intel Fortran Compiler for 32-bit applications, (version 9.1 build 20060323Z) PGI Fortran compiler 6.0-8 for Windows XP (32-bit) PGI C compiler 6.0-8 for Windows XP (32-bit) Microsoft Visual Studio .NET 7.0.9466 (for libraries) AMD Core Math Library V3.5.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
 +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use (Intel compiler)
 +FDO*: PASS1=-Mpfi  PASS2=-Mpfo (PGI compiler)
 +ACML is linking with AMD Core Math Library V3.5.0
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
 pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:       pgcc  -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO* ONESTEP=1
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
 168.wupwise:       pgf90 basepeak=yes
 171.swim:          ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0 ONESTEP=1
 172.mgrid:         pgf90 basepeak=yes
 173.applu:         ifort -Qipo  -O3  -QaxN -QxW +FDO -auto ONESTEP=1
 177.mesa:          icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias ONESTEP=1
                        -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:       pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML ONESTEP=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 179.art:           pgcc  -fastsse -Mipa=fast,inline
 183.equake:        icl   basepeak=yes
 187.facerec:       ifort -Qipo            -QxW +FDO -Qunroll3 ONESTEP=1
                        -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
 188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias ONESTEP=1
 189.lucas:         ifort -Qipo            -QxW      -Qunroll1 ONESTEP=1
 191.fma3d:         ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias- ONESTEP=1
 200.sixtrack:      pgf90 basepeak=yes
 301.apsi:          pgf90 basepeak=yes
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
```