CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

ASUS Computer International

Asus M2N32-SLI Deluxe, AMD Athlon (TM) 64 4200+

SPECfp2000 = 1610

SPECfp_base2000 = 1476

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2006 | Hardware Avail: Jun-2006 | Software Avail: Jun-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	65.2	2454	65.2	2454
171.swim	3100	136	2274	134	2315
172.mgrid	1800	133	1352	133	1352
173.applu	2100	149	1410	133	1577
177.mesa	1400	178	788	88.1	1590
178.galgel	2900	123	2360	113	2558
179.art	2600	87.7	2966	87.7	2966
183.equake	1300	82.1	1583	80.8	1609
187.facerec	1900	108	1767	108	1767
188.ammp	2200	257	855	229	962
189.lucas	2000	118	1691	100	1995
191.fma3d	2100	146	1443	144	1463
200.sixtrack	1100	163	673	163	674
301.apsi	2600	258	1006	259	1004

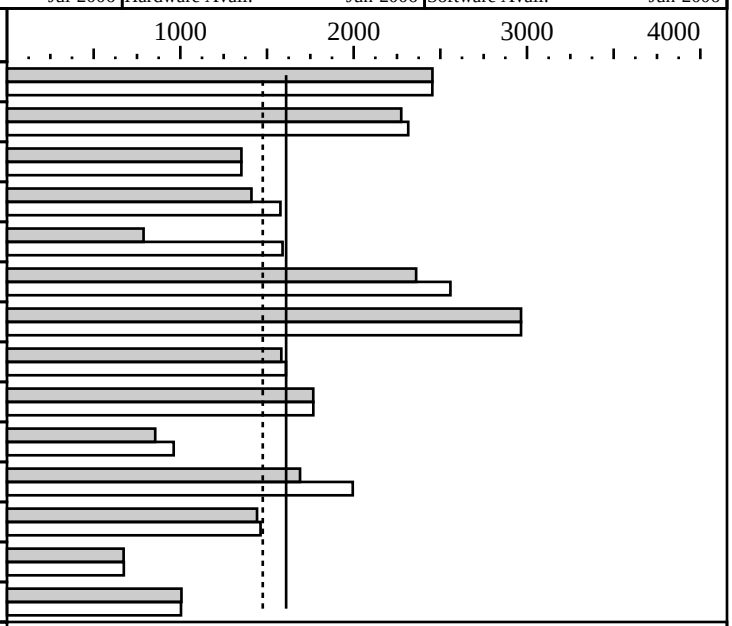

Hardware

CPU:	AMD Athlon (TM) 64 4200+
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	no
Primary Cache:	64KBI + 64KBD on chip, per core
Secondary Cache:	512KB (I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x1 GB, Corsair CM2X1024-8500C5 DDR2-1066 (manually set to DDR2-800 5-5-5-15 in the bios)
Disk Subsystem:	SATA, Western Digital WD740GD, 10000 rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows XP SP2
Compiler:	Intel C++ 9.1 build 20060519Z for IA32, Intel Fortran 9.1 build 20060519Z for IA32, PGI Fortran compiler 6.0-5 for Windows XP, PGI C compiler 6.0-5 for Windows XP, ACML Version 2.5.3 (bundled with PGI 6.0-5)
File System:	NTFS
System State:	default

Notes/Tuning Information

```
+FDO:
 icl, ifort  : PASS1=-Qprof_gen  PASS2=-Qprof_use
 pgf90       : PASS1=-Mpfi       PASS2=-Mpfo
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran 90 compiler.
pgcc is the PGI C compiler.
ONESTEP is set to 1 for every compile with the PGI compilers.
Portability:
178.galgel:                 -Mfixed
Baseline: C      :  pgcc    -fastsse -Mipa=fast,inline
Baseline: Fortran:  pgf90   -fastsse -Mipa=fast,inline +FDO
Peak tuning:
168.wupwise:        pgf90   -fastsse -Mipa=fast,inline -Mnovect
171.swim:           ifort   -Qipo  -O3  -QaxN -QxW -Qunroll0 +FDO
172.mgrid:          pgf90   -fastsse -Mipa=fast,inline
173.applu:          ifort   -Qipo  -O3 -QaxN -QxW -auto +FDO
177.mesa:           icl     -Qipo -arch:SSE2 -Qunroll1 -Qansi_alias +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                        -Qoption,f,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:          pgf90   -fastsse -Mipa=fast,safe -Munix -lacml
                              RM_SOURCES=lapak.f90
 179.art:             pgcc     basepeak=yes
 183.equake:          icl     -fast -arch:SSE2 -QaxW +FDO
 187.facerec:         pgf90   -fastsse -Mipa=fast,inline +FDO
 188.ammp:            icl     -Oa   -arch:SSE2  -Zp4 -Qansi_alias
 189.lucas:           ifort   -Qipo -QxW -Qunroll1
 191.fma3d:           pgf90   -Mipa=fast,inline -fastsse -Mnovect +FDO
 200.sixtrack:        pgf90   -fastsse -Mipa=fast,inline
 301.apsi:            pgf90   -fastsse -Mipa=fast,inline
The SUT was built with a discrete PCIe graphics card (ATI Radeon X850 XT)
and an ATX 550W power supply. The 2 DIMMs were configured in dual-channel mode.
```