CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3060, 2.40 GHz

SPECfp_rate2000 = 44.9

SPECfp_rate_base2000 = 44.9

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Aug-2006 | Hardware Avail: Sep-2006 | Software Avail: Jan-2006

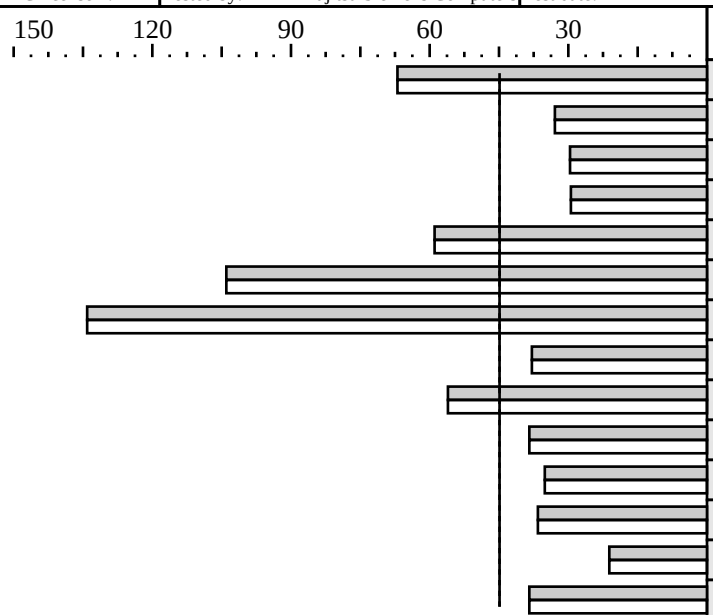

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	55.4	67.0	2	55.4	67.0
171.swim	2	219	32.9	2	219	32.9
172.mgrid	2	141	29.6	2	141	29.6
173.applu	2	165	29.4	2	165	29.4
177.mesa	2	55.1	58.9	2	55.1	58.9
178.galgel	2	64.7	104	2	64.7	104
179.art	2	45.0	134	2	45.0	134
183.equake	2	79.6	37.9	2	79.6	37.9
187.facerec	2	78.6	56.0	2	78.6	56.0
188.ammp	2	133	38.4	2	133	38.4
189.lucas	2	132	35.1	2	132	35.1
191.fma3d	2	133	36.6	2	133	36.6
200.sixtrack	2	121	21.1	2	121	21.1
301.apsi	2	157	38.4	2	157	38.4

Hardware

CPU:	Intel Xeon processor 3060 (2.40 GHz, 4MB L2, 1066 MHz system bus)
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	4096KB(I+D) on chip, per chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2GB DDRII-RAM PC2-4200E (CAS 4-4-4)
Disk Subsystem:	Western Digital (SATA, 7.2krpm, 160GB)
Other Hardware:	none

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ and Fortran Compiler 9.0 for EM64T Build 20060120 (for 64-bit applications)
File System:	reiserfs
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO implies feedback-directed optimization
PASS1: -prof_gen  PASS2: -prof_use

Optimization flags
ONESTEP=yes set for all benchmarks

Portability flags
-DSPEC_CPU2000_LP64 applied to all benchmarks
178.galgel: -FI for fixed-format Fortran

Base tuning flags
   for Fortran and C programs: -fast +FDO

Peak tuning flags
   same as baseline (basepeak=true set globally)
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

The system bus runs at 1066 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries