CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX100 S4, Intel Xeon processor 3040, 1.86 GHz

SPECfp_rate2000 = 35.9

SPECfp_rate_base2000 = 35.9

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Aug-2006 | Hardware Avail: Sep-2006 | Software Avail: Jan-2006

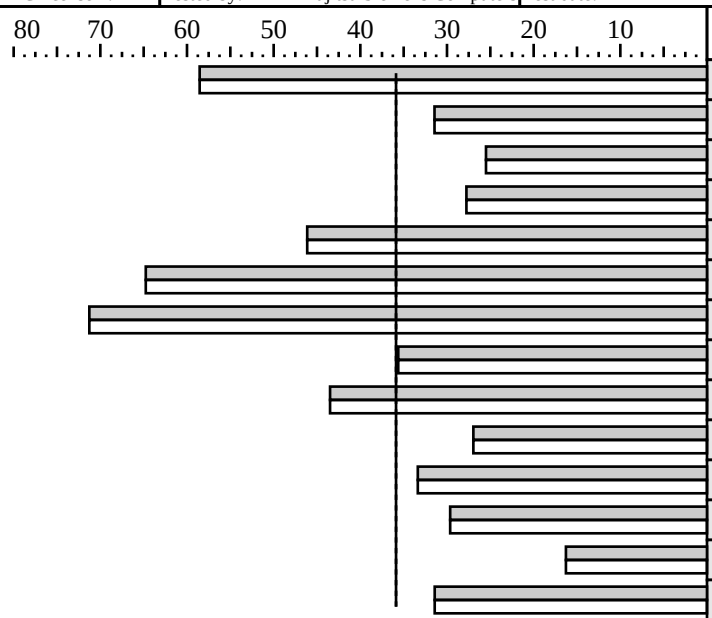

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	63.4	58.5	2	63.4	58.5
171.swim	2	229	31.4	2	229	31.4
172.mgrid	2	164	25.5	2	164	25.5
173.applu	2	176	27.8	2	176	27.8
177.mesa	2	70.4	46.1	2	70.4	46.1
178.galgel	2	104	64.8	2	104	64.8
179.art	2	84.6	71.3	2	84.6	71.3
183.equake	2	84.7	35.6	2	84.7	35.6
187.facerec	2	101	43.5	2	101	43.5
188.ammp	2	189	27.0	2	189	27.0
189.lucas	2	139	33.4	2	139	33.4
191.fma3d	2	164	29.6	2	164	29.6
200.sixtrack	2	157	16.3	2	157	16.3
301.apsi	2	192	31.4	2	192	31.4

Hardware

CPU:	Intel Xeon processor 3040 (1.86 GHz, 2MB L2, 1066 MHz system bus)
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	2048KB(I+D) on chip, per chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2GB DDRII-RAM PC2-4200E (CAS 4-4-4)
Disk Subsystem:	Seagate ST3146854SS (SAS, 15.4krpm, 146GB)
Other Hardware:	none

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ and Fortran Compiler 9.0 for EM64T Build 20060120 (for 64-bit applications)
File System:	ext3
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO implies feedback-directed optimization
PASS1: -prof_gen  PASS2: -prof_use

Optimization flags
ONESTEP=yes set for all benchmarks

Portability flags
-DSPEC_CPU2000_LP64 applied to all benchmarks
178.galgel: -FI for fixed-format Fortran

Base tuning flags
   for Fortran and C programs: -fast +FDO

Peak tuning flags
   same as baseline (basepeak=true set globally)
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

The system bus runs at 1066 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

BIOS configuration:
Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries