CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX600 S3, Intel Xeon processor 7140M, 3.40 GHz

SPECfp_rate2000 = 42.3

SPECfp_rate_base2000 = 42.3

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: Feb-2006

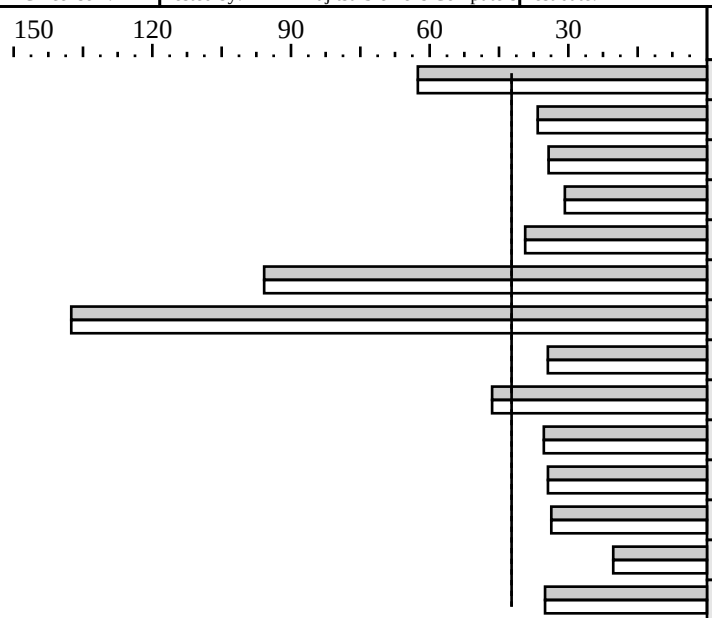

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	119	62.6	4	119	62.6
171.swim	4	393	36.6	4	393	36.6
172.mgrid	4	244	34.3	4	244	34.3
173.applu	4	317	30.8	4	317	30.8
177.mesa	4	165	39.3	4	165	39.3
178.galgel	4	140	95.8	4	140	95.8
179.art	4	87.7	138	4	87.7	138
183.equake	4	175	34.4	4	175	34.4
187.facerec	4	190	46.5	4	190	46.5
188.ammp	4	289	35.3	4	289	35.3
189.lucas	4	270	34.4	4	270	34.4
191.fma3d	4	289	33.7	4	289	33.7
200.sixtrack	4	252	20.3	4	252	20.3
301.apsi	4	344	35.0	4	344	35.0

Hardware

CPU:	Intel Xeon processor 7140M (3.40 GHz, 2x1MB L2, 16MB L3, 800 MHz system bus)
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1,2,4 chips
Parallel:	No
Primary Cache:	12k micro-ops(I) + 16KB(D) on chip, per core
Secondary Cache:	1024KB(I+D) on chip, per core
L3 Cache:	16MB on chip, per chip
Other Cache:	N/A
Memory:	16x1GB DDRII-RAM PC2-3200R (CAS 3-3-3)
Disk Subsystem:	Fujitsu MAS3367NC (SCSI, 15krpm, 36GB)
Other Hardware:	none

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 9 with SP3 Kernel 2.6.5-7.244-smp on an x86_64
Compiler:	Intel C++ and Fortran Compiler 9.0 for EM64T Build 20060120 (for 64-bit applications)
File System:	ext3
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO implies feedback-directed optimization
PASS1: -prof_gen  PASS2: -prof_use

Optimization flags
ONESTEP=yes set for all benchmarks

Portability flags
-DSPEC_CPU2000_LP64 applied to all benchmarks
178.galgel: -FI for fixed-format Fortran

Base tuning flags
   for Fortran and C programs: -fast +FDO

Peak tuning flags
   same as baseline (basepeak=true set globally)
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

The system bus runs at 800 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries