CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL365 (AMD Opteron (TM) 2218)

SPECint2000 = 1860

SPECint_base2000 = 1726

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2006 | Hardware Avail: Nov-2006 | Software Avail: Apr-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	96.8	1447	96.8	1447
175.vpr	1400	101	1392	99.3	1410
176.gcc	1100	56.0	1963	57.0	1929
181.mcf	1800	156	1157	127	1413
186.crafty	1000	59.4	1684	52.9	1891
197.parser	1800	111	1623	112	1608
252.eon	1300	52.0	2500	39.7	3274
253.perlbmk	1800	95.1	1893	95.1	1893
254.gap	1100	57.8	1903	57.8	1903
255.vortex	1900	71.4	2661	65.3	2910
256.bzip2	1500	112	1342	107	1397
300.twolf	3000	173	1734	142	2108

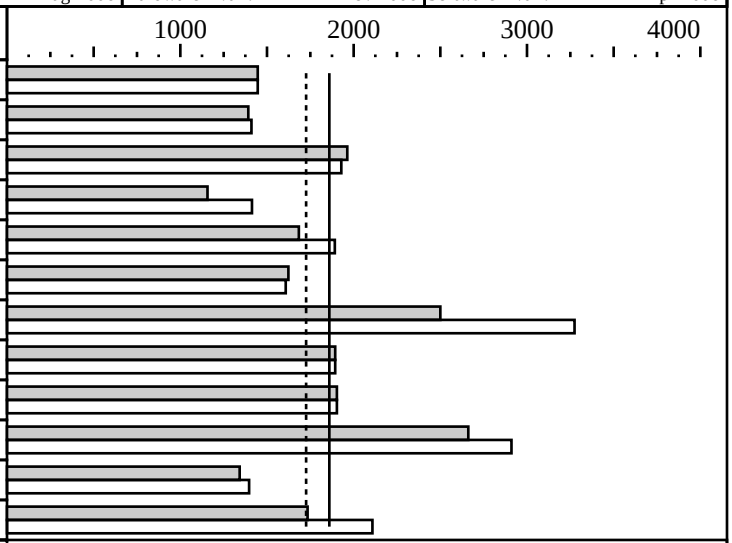

Hardware

CPU:	AMD Opteron (TM) 2218
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (4x2 GB PC2-5300P CL5.0)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -Qcxx_features -arch:SSE2 +FDO ONESTEP=yes
Portability flags:
  176.gcc:     -Dalloca=_alloca /F10000000
  186.crafty:  -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:    basepeak=yes
  175.vpr:     -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:     -fast -arch:SSE2 -Oi- -Qunroll3          +FDO
  181.mcf:     -O3 -Qipo -QaxN                         +FDO ONESTEP=yes shlw32M.lib
  186.crafty:  -fast -arch:SSE2                         +FDO ONESTEP=yes
  197.parser:  -arch:SSE2 -Oi- -Qipo                    +FDO ONESTEP=yes
  252.eon:     -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk: basepeak=yes
  254.gap:     basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  255.vortex:  -fast -arch:SSE2 -Oi- -Qoption,c,-ip_ninl_max_stats=2000
               -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes shlw32M.lib
  256.bzip2:   -O3 -Qipo -QaxN  -Qunroll2                              shlw32M.lib
  300.twolf:   -fast -arch:SSE2 -Qansi_alias           +FDO ONESTEP=yes shlw32M.lib
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
  The start /b /wait /affinity command is used to bind CPU(s) to processes.
```