CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX221 (Intel Xeon 5110 processor, 1.86GHz)

SPECfp_rate2000 = 54.5

SPECfp_rate_base2000 = 54.5

SPEC license #: 9001 | Tested by: Itautec | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

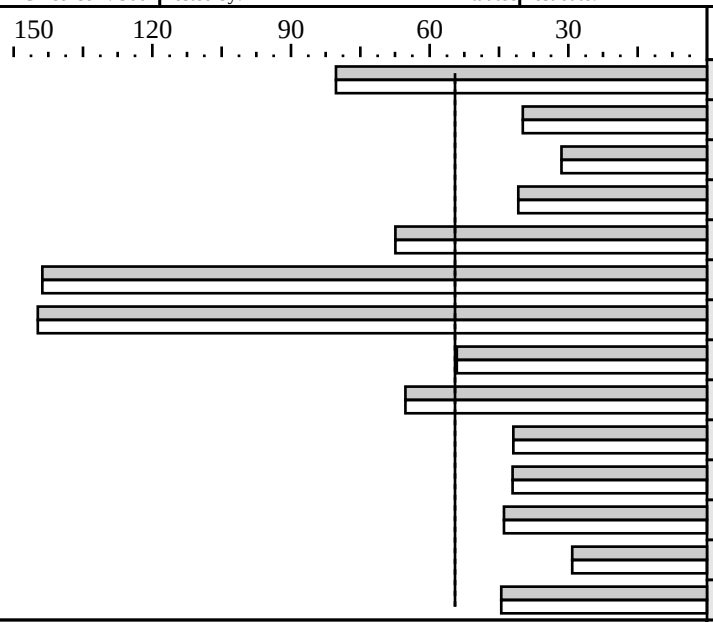

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	92.5	80.3	4	92.5	80.3
171.swim	4	361	39.9	4	361	39.9
172.mgrid	4	265	31.5	4	265	31.5
173.applu	4	239	40.8	4	239	40.8
177.mesa	4	96.4	67.4	4	96.4	67.4
178.galgel	4	93.6	144	4	93.6	144
179.art	4	83.3	145	4	83.3	145
183.equake	4	111	54.1	4	111	54.1
187.facerec	4	135	65.2	4	135	65.2
188.ammp	4	244	41.9	4	244	41.9
189.lucas	4	221	42.1	4	221	42.1
191.fma3d	4	222	43.9	4	222	43.9
200.sixtrack	4	175	29.2	4	175	29.2
301.apsi	4	271	44.5	4	271	44.5

Hardware

CPU:	Intel Xeon 5110 processor (1.60 GHz, 4MB L2 shared, 1066 MHz system bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4096KB(I+D) on chip, per chip, shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB DDR2-RAM PC2-5300F (CAS 5-5-5)ECC
Disk Subsystem:	1 x 36GB U320 SCSI 10000 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060519Z (for 32-bit applications), Intel Fortran Compiler 9.1 Build 20060519Z (for 32-bit applications), Microsoft Visual Studio .NET 7.0.9466 (for libraries), MicroQuill SmartHeap for SMP Library 8.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
PORTABILITY FLAGS
   178.galgel:  -FI /F32000000
GENERAL
   +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning flags
   for Fortran programs: -fast -Qansi_alias +FDO
   for C programs:       -fast               +FDO shlSMPMt.lib

EXTRA LIBRARIES
   MicroQuill SmartHeap for SMP Library 8.0 available from
   http://www.microquill.com/
```