CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX221 (Intel Xeon 5130 processor, 2.00GHz)

SPECint_rate2000 = 86.1

SPECint_rate_base2000 = 86.1

SPEC license #: 9001 | Tested by: Itautec | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

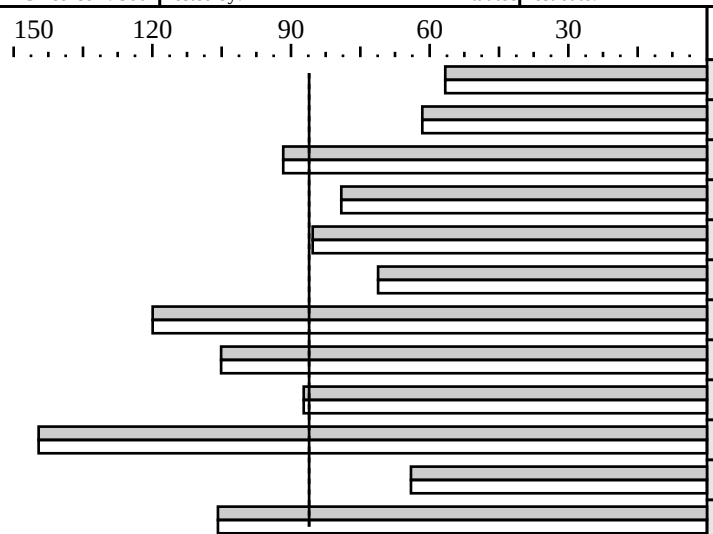

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	115	56.6	4	115	56.6
175.vpr	4	105	61.6	4	105	61.6
176.gcc	4	55.7	91.7	4	55.7	91.7
181.mcf	4	106	79.1	4	106	79.1
186.crafty	4	54.4	85.3	4	54.4	85.3
197.parser	4	117	71.2	4	117	71.2
252.eon	4	50.3	120	4	50.3	120
253.perlbmk	4	79.5	105	4	79.5	105
254.gap	4	58.5	87.2	4	58.5	87.2
255.vortex	4	61.0	145	4	61.0	145
256.bzip2	4	109	64.0	4	109	64.0
300.twolf	4	132	106	4	132	106

Hardware

CPU:	Intel Xeon 5130 processor (2.00GHz, 4MB L2 shared, 1333MHz system bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4096KB(I+D) on chip, per chip, shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB 533MHz ECC CL4 FB-DIMM DDR2 SDRAM
Disk Subsystem:	1 x 73GB SCSI 10000 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060519Z (for 32-bit applications), Microsoft Visual Studio .NET 7.0.9466 (for libraries), MicroQuill SmartHeap for SMP Library 8.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
PORTABILITY FLAGS
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafy:   -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
GENERAL
   +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning flags
   for C programs:   -fast +FDO shlSMPMt.lib
   for C++ programs: -fast -Qcxx_features +FDO
EXTRA LIBRARIES
   MicroQuill SmartHeap for SMP Library 8.0 available from
   http://www.microquill.com/
```