CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G2 (AMD Opteron (TM) 2220SE)

SPECfp_rate2000 = 40.4

SPECfp_rate_base2000 = 36.8

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Oct-2006 | Hardware Avail: Jan-2007 | Software Avail: Sep-2006

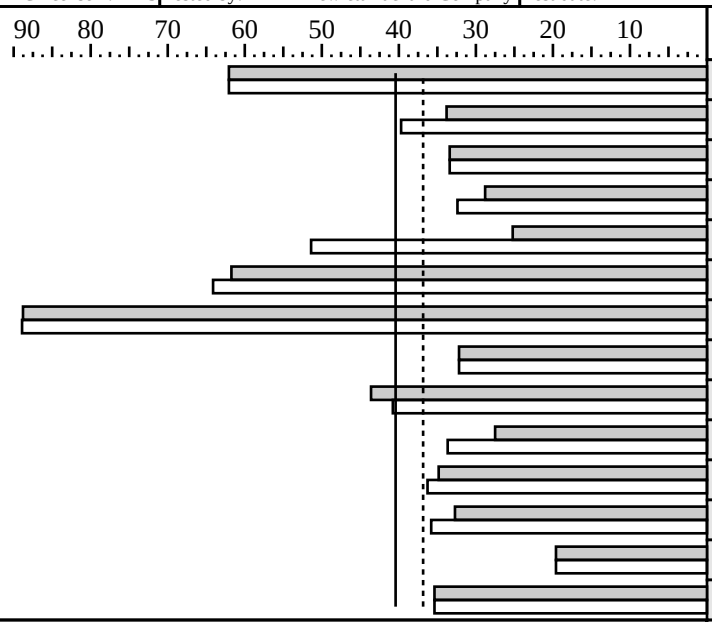

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	59.8	62.1	2	59.8	62.1
171.swim	2	213	33.8	2	181	39.7
172.mgrid	2	125	33.4	2	125	33.4
173.applu	2	169	28.8	2	150	32.4
177.mesa	2	129	25.2	2	63.2	51.4
178.galgel	2	109	61.7	2	105	64.1
179.art	2	67.9	88.8	2	67.8	88.9
183.equake	2	93.7	32.2	2	93.7	32.2
187.facerec	2	101	43.6	2	108	40.8
188.ammp	2	186	27.5	2	152	33.7
189.lucas	2	133	34.8	2	128	36.3
191.fma3d	2	149	32.7	2	136	35.8
200.sixtrack	2	130	19.6	2	130	19.6
301.apsi	2	171	35.4	2	171	35.4

Hardware

CPU:	AMD Opteron (TM) 2220SE
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (4x2 GB PC2-5300P CL5.0)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 9.1 Build 20060816Z) Intel Fortran Compiler for 32-bit applications, (version 9.1 build 20060816Z) PGI Fortran compiler 6.0-8 for Windows XP (32-bit) PGI C compiler 6.0-8 for Windows XP (32-bit) Microsoft Visual Studio .NET 7.0.9466 (for libraries) AMD Core Math Library V3.5.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
 +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use (Intel compiler)
 +FDO*: PASS1=-Mpfi  PASS2=-Mpfo (PGI compiler)
 +ACML is linking with AMD Core Math Library V3.5.0
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
 pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:       pgcc  -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO* ONESTEP=1
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
 168.wupwise:       pgf90 basepeak=yes
 171.swim:          ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0 ONESTEP=1
 172.mgrid:         pgf90 basepeak=yes
 173.applu:         ifort -Qipo  -O3  -QaxN -QxW +FDO -auto ONESTEP=1
 177.mesa:         icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias ONESTEP=1
                        -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:       pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML ONESTEP=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 179.art:           pgcc  -fastsse -Mipa=fast,inline
 183.equake:        icl   basepeak=yes
 187.facerec:       ifort -Qipo            -QxW +FDO -Qunroll3 ONESTEP=1
                        -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
 188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias ONESTEP=1
 189.lucas:         ifort -Qipo            -QxW      -Qunroll1 ONESTEP=1
 191.fma3d:         ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias- ONESTEP=1
 200.sixtrack:      pgf90 basepeak=yes
 301.apsi:          pgf90 basepeak=yes
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
  The start /b /wait /affinity command is used to bind CPU(s) to processes.
```