CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) D975XBX2 motherboard (3.73 GHz, Intel(R) Pentium(TM) processor Extreme Edition 965)

SPECint_rate2000 = 44.8

SPECint_rate_base2000 = 44.6

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2006 | Hardware Avail: Nov-2006 | Software Avail: May-2006

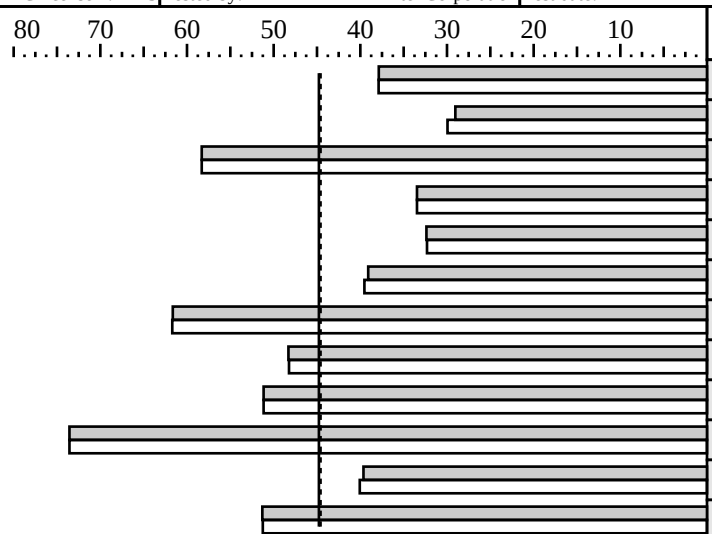

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	172	37.9	4	171	37.9
175.vpr	4	224	29.0	4	217	29.9
176.gcc	4	87.5	58.3	4	87.5	58.3
181.mcf	4	250	33.5	4	250	33.5
186.crafty	4	143	32.4	4	144	32.3
197.parser	4	214	39.1	4	211	39.5
252.eon	4	97.9	61.6	4	97.8	61.7
253.perlbmk	4	173	48.3	4	173	48.2
254.gap	4	99.8	51.2	4	99.8	51.2
255.vortex	4	120	73.6	4	120	73.6
256.bzip2	4	176	39.6	4	174	40.1
300.twolf	4	271	51.3	4	272	51.3

Hardware

CPU:	Intel(R) Pentium(TM) processor Extreme Edition 965 (3.73 GHz, 1066 MHz bus)
CPU MHz:	3733
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD per core, on chip
Secondary Cache:	2MB(I+D) per core, on chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Corsair TWIN2X2048-8500C5 DDR2 1066 CL5-5-5 DIMMs)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	nVidia Quad SLI GeForce 7950 GX2 PCI Express graphics card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M-80.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M-80.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M-80.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M-80.lib
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 11/2006
http://www.intel.com/products/motherboard/D975XBX2/index.htm
The system bus runs at 1066 MHz
```