CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) D975XBX2 motherboard (3.73 GHz, Intel(R) Pentium(TM) processor Extreme Edition 965)

SPECfp_rate2000 = 40.9

SPECfp_rate_base2000 = 40.8

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2006 | Hardware Avail: Nov-2006 | Software Avail: May-2006

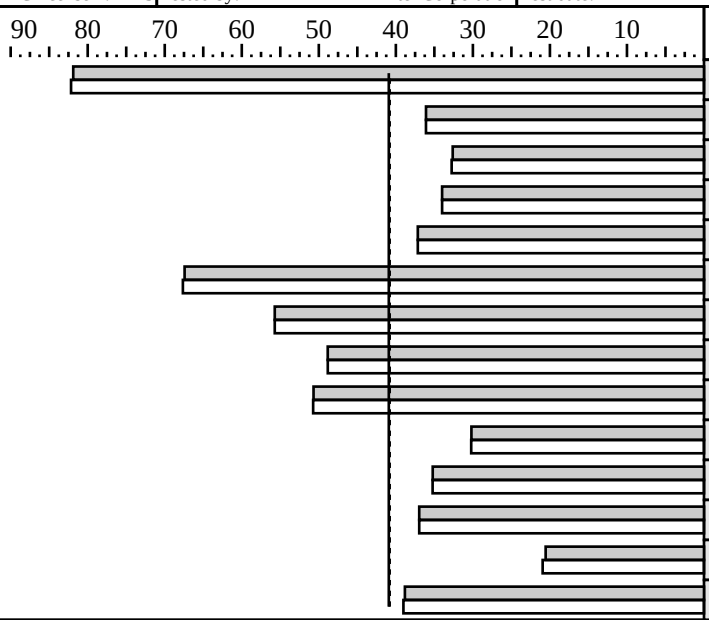

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	90.7	81.9	4	90.4	82.2
171.swim	4	399	36.1	4	399	36.1
172.mgrid	4	256	32.6	4	255	32.8
173.applu	4	287	34.0	4	287	34.0
177.mesa	4	175	37.1	4	175	37.1
178.galgel	4	200	67.4	4	199	67.6
179.art	4	217	55.7	4	217	55.7
183.equake	4	124	48.8	4	124	48.8
187.facerec	4	174	50.7	4	174	50.7
188.ammp	4	338	30.2	4	338	30.2
189.lucas	4	264	35.2	4	263	35.2
191.fma3d	4	264	37.0	4	264	37.0
200.sixtrack	4	248	20.6	4	244	20.9
301.apsi	4	311	38.8	4	309	39.0

Hardware

CPU:	Intel(R) Pentium(TM) processor Extreme Edition 965 (3.73 GHz, 1066 MHz bus)
CPU MHz:	3733
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD per core, on chip
Secondary Cache:	2MB(I+D) per core, on chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	nVidia Quad SLI GeForce 7950 GX2 PCI Express graphics card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for C programs:  -fast    +FDO shlW32M-80.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M-80.lib
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M-80.lib
189.lucas:    -fast -Qprefetch- +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 11/2006
http://www.intel.com/products/motherboard/D975XBX2/index.htm
The system bus runs at 1066 MHz
```